

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-20635-00-00
Spot: W2NENE Sec/Twnshp/Rge: 13-32S-10W
4620 feet from S Section Line, 990 feet from E Section Line
Lease/Unit Name: MCDANIEL Well Number: A-1
County: BARBER Total Vertical Depth: 4410 feet

Operator License No.: 5429
Op Name: HAYES, BRYCE F., DBA BRYCE F. OIL
Address: 1081 WEST HIGHWAY 160 PO BOX 108
ATTICA, KS 67009

Production Casing Size: 5.5 feet: 4409 WITH 150 SX CMT
Surface Casing Size: 8.625 feet: 239 WITH 250 SX CMT

8143³³

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/11/2003 9:30 AM
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION
Proposal Rcvd. from: ALAN VRATIL Company: CLARKE CORPORATION Phone: (620) 886-5665

Proposed Plugging Method: CIBP @ 4300' WITH 2 SX CMT. PUMP 8 5/8" WITH 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 100 SX CMT.

Plugging Proposal Received By: SCOTT ALBERG WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 12/11/2003 10:30 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:


PBTD 4365'. PERFS AT 4345-48'. JUNK IN HOLE: APPROXIMATELY 13 JOINTS OF 2 3/8" TUBING & TUBING ANCHOR CATCHER. SET CIBP @ 4000' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. PUMPED DOWN 8 5/8" WITH 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS & 100 SX CMT. MAXIMUM PRESSURE 750#. SHUT IN PRESSURE 500#. NO WIPER PLUG. POOR BOYED BACK TO 5 1/2' COLLAR.

RECEIVED
DEC 23 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2200' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

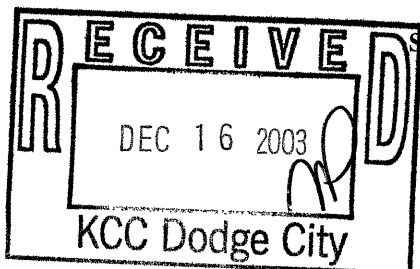

Signed

Stephen J. Pfeifer
(TECHNICIAN)

INVOICED
DATE 12.24.03
INV. NO. 2000/060982

Form OK 11/3