

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-081-20039-00-00  
Spot: SW Sec/Twnshp/Rge: 22-27S-32W  
1320 feet from S Section Line, 1320 feet from W Section Line  
Lease/Unit Name: GILES Well Number: 1  
County: HASKELL Total Vertical Depth: 2775 feet

Operator License No.: 32334  
Op Name: CHESAPEAKE OPERATING, INC.  
Address: PO BOX 18496 6200 N WESTERN AVE.  
OKLAHOMA CITY, OK 73154

Production Casing Size: 4.5 feet: 2774 WITH 600 SX CMT  
Surface Casing Size: 8.625 feet: 504 WITH 375 SX CMT

#90'9"

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/21/2003 2:30 PM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (405) 848-8000

Proposed  
Plugging  
Method:

PUMP 400# HULLS & 165 SX CMT IN 4 1/2". PRESSURE TEST. CHECK BACKSIDE.

Plugging Proposal Received By: KEVIN STRUBE WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 11/21/2003 3:15 PM KCC Agent: KEVIN STRUBE

Actual Plugging Report:


PERFS AT 2658-2670'. PUMPED DOWN 4 1/2" CASING 400# HULLS MIXED IN CMT. PUMPED 165 SX CMT. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 400#. PUMPED DOWN 8 5/8" X 4 1/2" ANNULUS 35 SX CMT. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 500#.

RECEIVED  
KANSAS CORPORATION COMMISSION  
NOV 26 2003  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

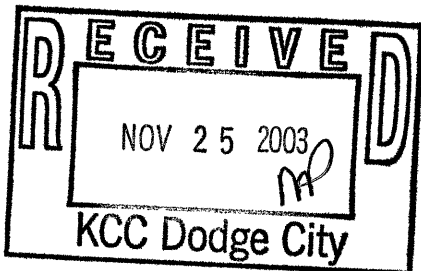

Signed

*Kevin D. Strube*

(TECHNICIAN)

INVOICED  
DATE 12-1-03  
INV. NO. 2004060833

Form CR 2/03