

RECEIVED

NOV 06 2003

KCC WICHITA

STATE OF KANSAS
KANSAS CORPORATION COMMISSION
CONSERVATION DIVISION
130 South Market - Room 2078
Wichita, Kansas 67202

FORM CP-1 (3/92)

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 15-185-22,953-00-00 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

4/03

WELL OPERATOR F.G. Holl Company, L.L.C. KCC LICENSE # 5056
(owner/company name) (operator's)
ADDRESS 9431 E. Central, Suite 100 CITY Wichita

STATE Kansas ZIP CODE 67206-2543 CONTACT PHONE # (316) 684-8481

LEASE SCHLOCHTERMEIER "B" -7 WELL# 1-7 SEC. 7 T. 21S R. 11 (East/West)

C - SE-NE-SE SPOT LOCATION/OOOO COUNTY Stafford

1650 FEET (in exact footage) FROM S/N (circle one) LINE OF SECTION (NOT Lease Line)

330 FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL GAS WELL D&A SWD/ENHR WELL DOCKET# _____

CONDUCTOR CASING SIZE _____ SET AT _____ CEMENTED WITH _____ SACKS

SURFACE CASING SIZE 8-5/8" SET AT 265' CEMENTED WITH 225sx SACKS

PRODUCTION CASING SIZE 5-1/2" SET AT 3546' CEMENTED WITH 175sx SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: 3408'-3413', 3438'-3450' Simpson Sd & Arbuckle

ELEVATION 1814KB T.D. 3550' PBD 3424' ANHYDRITE DEPTH 586'
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD POOR CASING LEAK JUNK IN HOLE

PROPOSED METHOD OF PLUGGING Heavy Mud, Hulls, cement and plug according to KCC specifications.

(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? Yes
If not explain why? _____

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Rob LOrj PHONE# (620) 793-0195/(620) 786-5783(cell)

ADDRESS P.O. BOX 158 City/State Belore, KS. 67519

PLUGGING CONTRACTOR Quality Well Service KCC LICENSE # 31925

8/04

ADDRESS 410 West Main, Ivson, KS. 67554 PHONE # 620) 727-3410

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) Not known

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 11/05/2003 AUTHORIZED OPERATOR/AGENT: Loueness Mpanje
(signature)

RECEIVED
NOV 06 2003
KCC WICHITA

STERLING DRILLING COMPANY

BOX 129
STERLING, KANSAS 67579
(316) 278-2131

15-185-22953-00-00

SAMPLE LOG - - - - - SCHLOCHTERMEIR B #1-7
Located: C SE NE SE, Section 7-21S-11W,
Stafford County, Kansas

OWNER: F. G. HOLL COMPANY L.L.C.
ROTARY DRILLING CONTRACTOR: STERLING DRILLING COMPANY

COMMENCED: February 17, 1994
COMPLETED: February 23, 1994

TOTAL DEPTH: 3550' K.B. Driller
3548' K.B. Logger

LOG

0 - 220 Surface Soil and Sand
220 - 270 Red Bed
270 - 586 Red Beds - Shales
586 - 600 Anhydrite
600 - 670 Red Bed - Shales
670 - 1335 Shales
1335 - 3437 Lime and Shale
3437 - 3550 Arbuckle


CASING RECORD

Spudded at 7:15 AM, 2-17-94. Drilled 270' 12 1/4" hole. Ran 6 joints 8 5/8", 23# casing. 253.72' pipe set at 265' K.B. Cemented with 225 sacks 60/40 Pozmix with 2% gel and 3% cc. Plug down at 10:30 AM, 2-17-94, by Howco. Good returns.

Ran 83 joints 5 1/2" new and used casing (512.16' used). 3547.17' pipe set at 3546' K.B. Cemented with 20 bbl. salt flush and 500 gal. super flush, followed with 50 sacks Lite cement, followed with 125 sacks F. G. Holl mix. Plug down at 12:30 PM, 2-23-94, by Howco. Shoe joint 10.16, centralizers on Joints 1, 5, 10 and 14. Scratchers from 3400' to 3480'. Plugged rathole with 15 sacks.

DEVIATION SURVEYS

1/2 degree at 270'
3/4 degree at 3420'
1 3/4 degree at 3550'

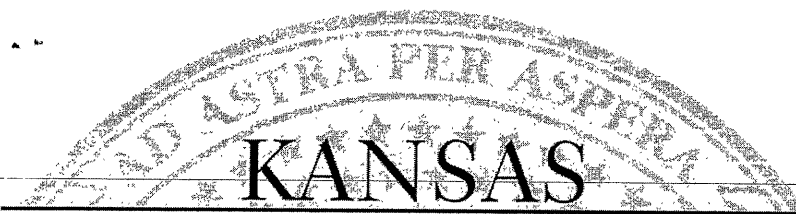

KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair John Wine, Commissioner Robert E. Krehbiel, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Holl, F.G., Company L.L.C.
9431 E Central, Suite 100
Wichita, KS 67206

November 10, 2003

Re: SCHLOCHTERMEIER B #1-7
API 15-185-22953-00-00
SENESE 7-21S-11W, 1650 FSL 330 FEL
STAFFORD COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely



David P. Williams
Production Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888