

RECEIVED  
DEC 12 2003  
KCC WICHITA

STATE OF KANSAS  
KANSAS CORPORATION COMMISSION  
CONSERVATION DIVISION  
130 South Market - Room 2078  
Wichita, Kansas 67202

FORM CP-1 (3/92)

**WELL PLUGGING APPLICATION FORM**

15-129-10034-00-00 (PLEASE TYPE FORM and File ONE Copy)

API # Jan. 21, 1955 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR Nadel and Gussman, L.L.C. KCC LICENSE # 32638  
(owner/company name) (operator's)

ADDRESS 3200 First Place Tower CITY Tulsa

STATE Oklahoma ZIP CODE 74103 CONTACT PHONE # (918) 5833333

LEASE Dreyer WELL# 1-6 SEC. 6 T. 32S R. 43 (East, West)

C - NW - NW - SE SPOT LOCATION/QQQQ COUNTY Morton

2310 FEET (in exact footage) FROM S/N (circle one) LINE OF SECTION (NOT Lease Line)

2310 FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL  GAS WELL  D&A  SWD/ENHR WELL  DOCKET# \_\_\_\_\_

CONDUCTOR CASING SIZE NA SET AT \_\_\_\_\_ CEMENTED WITH \_\_\_\_\_ SACKS

SURFACE CASING SIZE 8-5/8 SET AT 599 CEMENTED WITH surface SACKS

PRODUCTION CASING SIZE 5-1/2 SET AT 3353 CEMENTED WITH 1500' FS SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: 3218-3284', 2936'-3148' squeezed

ELEVATION 3645 T.D. 3295 PBDT 3295 ANHYDRITE DEPTH \_\_\_\_\_  
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD  POOR  CASING LEAK  JUNK IN HOLE

PROPOSED METHOD OF PLUGGING Set a CIBP @ 2900' and dump 2 sks cmt on plug. Load hole w/drlg mud.

Cut off 5-1/2" csg @ 1300' and spot a 70 sk cmt plug from 700-500'. Spot a 10 sk plug from 40' to surface.

Cut off csg 3' below GL and weld on I.D. Plate.  
(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? No

If not explain why? Well to old.

**PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.**

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

John May PHONE# (620) 697-2137

ADDRESS P.O. Box 773 City/State Ellkhart, KS 67950

PLUGGING CONTRACTOR Eagle Well Service et. al. KCC LICENSE # 7407  
(company name) (contractor's)

ADDRESS 1661 West 7th, Liberal, KS 67901 PHONE # (620) 624-1904


PROPOSED DATE AND HOUR OF PLUGGING (If Known?) 12/15/03

**PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT**

DATE: 12/10/03 AUTHORIZED OPERATOR/AGENT: [Signature]  
(signature)

4/84

6/04

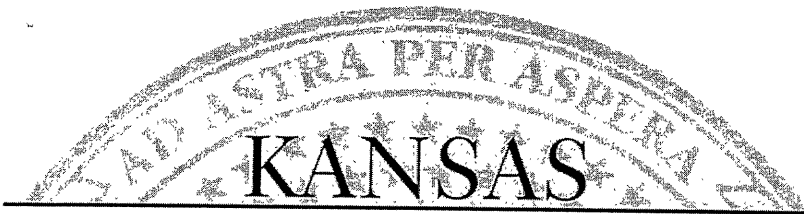

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Nadel and Gussman, LLC  
3200 First Place Tower  
Tulsa, OK 74103-4313

December 16, 2003

Re: DREYER #1-6  
API 15-129-10034-00-00  
NWNWSE 6-32S-43W, 2310 FSL 2910 FWL  
MORTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely

David P. Williams  
Production Supervisor

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888