

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-22859-00-00  
Spot: SWSE Sec/Twnshp/Rge: 15-22S-12W  
660 feet from S Section Line, 2310 feet from E Section Line  
Lease/Unit Name: SIEFKES KS Well Number: 2  
County: STAFFORD Total Vertical Depth: 3676 feet

Operator License No.: 4656  
Op Name: DAVIS PETROLEUM, INC.  
Address: RR 1, BOX 183 B  
GREAT BEND, KS 67530

Production Casing Size: 5.5 feet: 3675 WITH 125 SX CMT  
Surface Casing Size: 8.625 feet: 297 WITH 185 SX CMT

# 119 47

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/30/2003 10:30 AM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Rcvd. from: MONTE ANDREWS Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3550' & 5 SX CMT. PUMP 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 100 SX CMT.

Plugging Proposal Received By: KEVIN STRUBE WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/30/2003 11:50 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:


OPEN HOLE 3675-3676'. SANDED TO 3550' & PLACED 5 SX CMT ON TOP OF SAND WITH DUMP BAILER. PUMPED DOWN 8 5/8" CASING WITH 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 100 SX CMT. MAXIMUM PRESSURE 350 PSIG. SHUT IN PRESSURE 200 PSIG.

RECEIVED  
JAN 14 2004  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2003' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

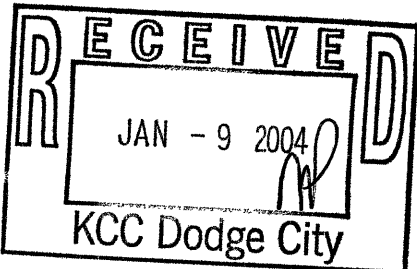

Signed

Richard W. Lacey

(TECHNICIAN)

INVOICED

DATE

1-14-04

NO. 2004061059

Form C-3