

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-119-20143-00-00  
Spot: W2W2NE Sec/Twnshp/Rge: 24-34S-30W  
3898 feet from S Section Line, 2455 feet from E Section Line  
Lease/Unit Name: ADAMS H G Well Number: 1-24  
County: MEADE Total Vertical Depth: 6110 feet

Operator License No.: 33085  
Op Name: NICHOLS LLC  
Address: RR1 BOX 8 EAST HIGHWAY 64  
FORGAN, OK 73938

Production Casing Size: 5.5 feet: 6110 WITH 125 SX CMT  
Surface Casing Size: 8.625 feet: 699 WITH 450 SX CMT

*A 19858*

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 01/19/2004 10:00 AM  
Plug Co. License No.: 32833 Plug Co. Name: SARGENT LILLARD CASING PULLING, INC.  
Proposal Rcvd. from: KIRBY LILLARD Company: SARGENT LILLARD CASING PULL Phone: (580) 254-1881

Proposed Plugging Method: DUMP 25 SX CMT TO 5850'. PLUG AT 1450' WITH 50 SX CMT. PLUG AT 730' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT

Plugging Proposal Received By: STEVE DURRANT Witness Type: NONE  
Date/Time Plugging Completed: 01/19/2004 5:30 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:


PBTD 5970'. PERFS AT 5920-5925'. BOTTOM PLUG PUMP 25 SX CMT & 100# HULLS. 1ST PLUG SPOT 50 SX CMT AT 1450'. 2ND PLUG PULL TO 770'. PIPE STUCK. CUT AT 770'. PULL TO 730' & PUMP 50 SX CMT. 3RD PLUG AT 0-40' WITH 10 SX CMT.

RECEIVED  
JAN 23 2004  
KCC WICHITA

Remarks: USED COMMON CEMENT BY SARGENT LILLARD. RECOVERED 2800' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

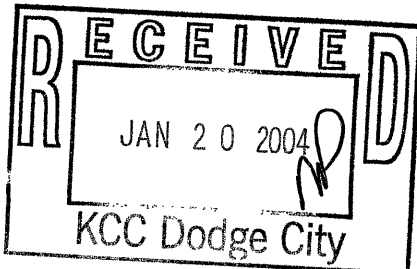

Signed \_\_\_\_\_

*Steve Durrant*  
(TECHNICIAN)

INVOICED  
DATE 1-23-04  
INV. NO. 200406104