

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-129-21062-00-00  
Spot: N2NESE Sec/Twnshp/Rge: 31-31S-39W  
2050 feet from S Section Line, 660 feet from E Section Line  
Lease/Unit Name: MILBURN A Well Number: 1  
County: MORTON Total Vertical Depth: 6001 feet

Operator License No.: 5447  
Op Name: OXY USA, INC.  
Address: PO BOX 27570 5 E GREENWAY PLZ  
HOUSTON, TX 77227

Conductor Pipe Size: 20 feet: 41 WITH 3 1/2 YARDS  
Production Casing Size: 5.5 feet: 6000 WITH 1330 SX CMT  
Surface Casing Size: 8.625 feet: 1729 WITH 745 SX CMT

#19503

Well Type: GAS UIC Docket No: Date/Time to Plug: 01/08/2004 1:00 PM

Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.

Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: CIBP @ 5750' WITH 2 SX CMT. PLUG AT 1800' WITH 25 SX CMT. PLUG AT 1500' WITH 30 SX CMT. PLUG AT 500' WITH 30 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 01/09/2004 10:00 AM

KCC Agent: JIM HOLLAND

Actual Plugging Report:


PBTD 5940'. PERFS AT 5783-92, 5823-32, 5835-51'. DV TOOL @ 3082'. TOC @1500' +/- . CIBP @ 5750' WITH 2 SX CMT. 1ST PLUG LOAD 5 1/2" WITH MUD TO 1800'. CHECK WITH WIRELINE. PUMP 25 SX CMT INSIDE 5 1/2" CASING. DISPLACE TO 1800' WITH MUD. 2ND PLUG CIRCULATE HOLE WITH MUD & PUMP 30 SX CMT AT 1250'. GOOD CIRCULATION. 3RD PLUG PULL OUT OF HOLE TO 500'. CIRCULATE HOLE & PUMP 30 SX CMT. GOOD CIRCULATION. 4TH PLUG PULL OUT OF HOLE TO 5 1/2" TO 40'. SDON. 01/09/04: LOAD HOLE WITH MUD & PUMP 10 SX CMT TO SURFACE.

RECEIVED  
JAN 21 2004  
KCC WICHITA

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 1250' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

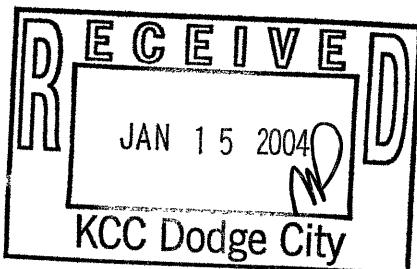

Signed

Jim Holland  
(TECHNICIAN)

INVOICED

DATE 1-21-04

INV. NO. 20040161089

Form CP-13