

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-20209-00-00
Spot: N2SW Sec/Twnshp/Rge: 2-33S-31W
1980 feet from S Section Line, 3960 feet from E Section Line
Lease/Unit Name: HEADRICK Well Number: 1-A
County: SEWARD Total Vertical Depth: 3210 feet

Operator License No.: 4058
Op Name: AMERICAN WARRIOR, INC.
Address: PO BOX 399
GARDEN CITY, KS 67846

Production Casing Size: 4.5 feet: 3210 WITH 400 SX CMT
Surface Casing Size: 8.625 feet: 600 WITH 355 SX CMT

104.33

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 01/15/2004 11:30 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: WAYNE WILSON Company: SWIFT SERVICES, INC. Phone: (785) 798-2300

Proposed Plugging Method: PUMP DOWN 4 1/2" WITH 400# HULLS & CEMENT TO FILL. PUMP DOWN 8 5/8" X 4 1/2" WITH 150 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/15/2004 12:45 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:


PERFS AT 3146-3149, 3134-3140, 3051-3056, 3093-3098, & 3115-3120'. PUMP DOWN 4 1/2" 400# HULLS & 175 SX CMT. SHUT IN PRESSURE 650#. TESTED BACKSIDE TO 650#.

RECEIVED
JAN 21 2004
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. NO CASING RECOVERED.

Plugged through: CSG

District: 01

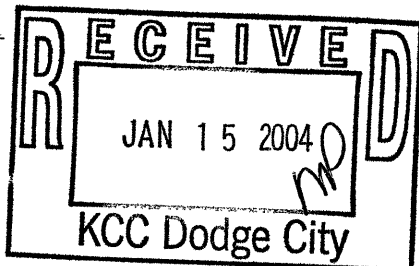

Signed _____

[Signature]
(TECHNICIAN)

INVOICED

DATE 1-21-04
INV. NO 2004061085

[Signature]
Form CR 2/3