

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-21714-00-00
Spot: E2NESW Sec/Twnshp/Rge: 7-17S-25W
1990 feet from S Section Line, 3180 feet from E Section Line
Lease Name: STUTZ B Well #: 3
County: NESS Total Vertical Depth: 4513 feet

Operator License No.: 6009
Op Name: DOUBLE EAGLE EXPLORATION, INC.
Address: 800 W. 47TH STREET, STE 318
KANSAS CITY, MO 64112

PROD Size: 4.5 feet: 4508 WITH 250 SX CMT
SURF Size: 8.625 feet: 306 WITH 180 SX CMT

#146⁶⁷

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/23/2004 10:45 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MONTE ANDREWS Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: TEST CASING. PUMP 20 SX CMT TEST CASING. PERFORATE AND CIRCULATE CMT TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT
Date/Time Plugging Completed: 01/23/2004 3:00 PM

Witness Type: COMPLETE (100%)
KCC Agent: MICHAEL MAIER

Actual Plugging Report:


OPEN HOLE. COULD NOT GET BELOW 1350'. BRIDGED OFF & JUNK IN HOLE. TESTED CASING FROM 1254' TO SURFACE. HELD AT 500# FOR 30 MINUTES. PUMPED 20 SX COMMON CMT WITH 3% CC AT 1285'. WAITED 1 1/2 HOURS AND PRESSURED CASING TO 500# AND HELD. PERFORATED AT 1100'. PUMPED 150 SX CMT. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 150#. TIED ONTO BACKSIDE & PUMPED 150 SX CMT. MAXIMUM PRESSURE 250#. SHUT IN PRESSURE 200#. TOPPED CASING OFF WITH 10 SX CMT. STAYED FULL.

Perfs:	
Top	Bot
4508	4513 <u>O.H.</u>

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: TBG

District: 01

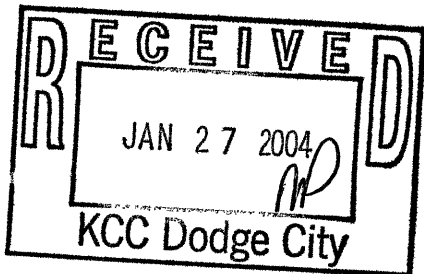

Signed

Michael J Maier

(TECHNICIAN)

RECEIVED
FEB 04 2004
KCC WICHITA

INVOICED
DATE 2-4-04
INV. NO. 2004061147

Form CP-2/B