

RECEIVED

FEB 05 2004

KCC WICHITA

STATE OF KANSAS
KANSAS CORPORATION COMMISSION
CONSERVATION DIVISION
130 South Market - Room 2078
Wichita, Kansas 67202

FORM CP-1 (3/92)

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 1505100928-00-02 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

3/04

WELL OPERATOR Osage Resources, L.L.C. KCC LICENSE # 32811
(owner/company name) (operator's)

ADDRESS 1605 E. 56th Ave. CITY Hutchinson

STATE Kansas ZIP CODE 67502 CONTACT PHONE # (620) 664-9622

LEASE E. Leiker WELL# 1 SWD SEC. 11 T. 14 R. 18 (East/~~West~~)

SW - SW - NE - SPOT LOCATION/QOOO COUNTY Ellis

2970 FEET (in exact footage) FROM S/N (circle one) LINE OF SECTION (NOT Lease Line)

2310 FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL ___ GAS WELL ___ D&A ___ SWD/ENHR WELL DOCKET# D-20,804

CONDUCTOR CASING SIZE 16" SET AT 229' CEMENTED WITH 200 SACKS

SURFACE CASING SIZE 8 5/8" SET AT 1190' CEMENTED WITH 475 SACKS

PRODUCTION CASING SIZE 4 1/2" SET AT 3880' CEMENTED WITH 100 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: 3880 to 3915' is open hole.

ELEVATION 1980' GL T.D. 3915 PBTB 3258' ANHYDRITE DEPTH 1182'
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD POOR ___ CASING LEAK ___ JUNK IN HOLE

PROPOSED METHOD OF PLUGGING Load casing and establish injection rate, displace 95 to 115 sacks of cement to 1100'. SI to cure. Perforate 4 1/2" casing just above PBTB and establish circulation to surface and circulate cement to surface. This well is intended to be completed as a water supply well.

(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? IS ACO-1 FILED? Unknown

If not explain why? This is an old well. I assume an ACO-1 was filled by the previous operator.

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Ben Crouch PHONE# () 620-664-9622

ADDRESS 1605 E. 56th Ave City/State Hutchinson, Kansas


PLUGGING CONTRACTOR Allied Cementing Co., Inc. KCC LICENSE # None Req.
(company name) (contractor's)

ADDRESS PO BOX 31, Russell, Kansas 67665 PHONE # () 785-483-3887

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) Unknown

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 1/22/2004 AUTHORIZED OPERATOR/AGENT: Benjamin W. Crouch
(signature)

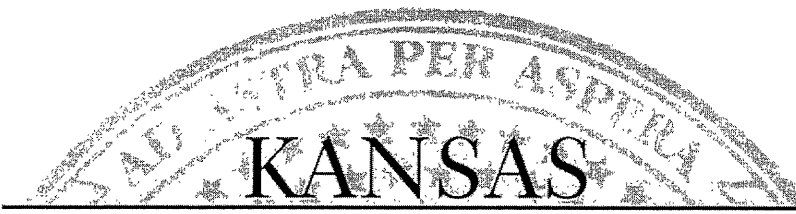

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

OSAGE Resources, LLC
1605 E. 56th Avenue
Hutchinson, KS 67502

February 11, 2004

Re: EMMA LEIKER OWWO #1
API 15-051-00928-00-02
SWSWNE 11-14S-18W, 2970 FSL 2310 FEL
ELLIS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #4
2301 E. 13th
Hays, KS 67601
(785) 625-0550

Sincerely

David P. Williams
Production Supervisor