

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-22080-00-01
Spot: S2S2SE Sec/Twnshp/Rge: 14-34S-35W
330 feet from S Section Line, 1320 feet from E Section Line
Lease Name: CLODFELTER Well #: 3
County: STEVENS Total Vertical Depth: 6865 feet

Operator License No.: 5447
Op Name: OXY USA, INC.
Address: PO BOX 27570 5 E GREENWAY PLZ
HOUSTON, TX 77227

PROD Size: 5.5 feet: 3088 WITH 400 SX CMT
SURF Size: 8.625 feet: 1521 WITH 450 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 01/30/2004 2:30 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DOM HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 300# HULLS & 25 SX CMT. PLUG AT 550' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/02/2004 10:30 AM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PBTD 3068'. PUMP 300# HULLS WITH 25 SX CMT. DISPLACE WITH MUD.
PRESSURE TO 500 PSIG & SHUT IN. CUT 5 1/2" OFF AT 717'. 1ST PLUG CIRCULATE
HOLE WITH MUD. PUMP 50 SX CMT AT 717'. GOOD CIRCULATION. SDON.
02/02/04: 2ND PLUG PULL OUT OF HOLE WITH CASING TO 40'. LOAD HOLE WITH
MUD & PUMP 10 SX CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
2750	2756		
2706	2710		
2680	2686		

RECEIVED
KANSAS CORPORATION COMMISSION
FEB 10 2004
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 717' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

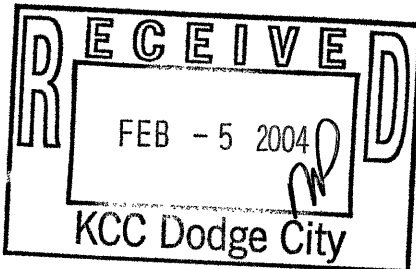

Signed _____

Jim Holland
(TECHNICIAN)

Form CR-2/3