


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

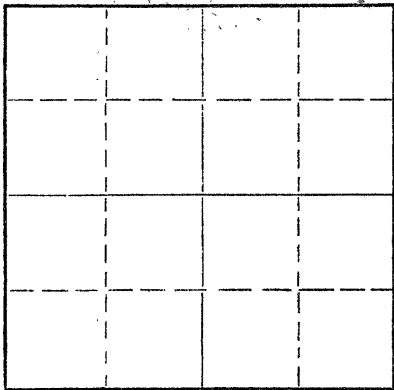

Locate well correctly on above  
Section Plat

Phillips County, Sec. 27 Twp. 1 Rge. 18 (E) (W) x  
Location as "NE/CNW/SW" or footage from lines C of SW NW  
Lease Owner Red Barron Production  
Lease Name Parker Well No. #1  
Office Address Box 55, Phillipsburg, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 6-12-68 19  
Application for plugging approved 19  
Plugging commenced 6-12-68 19  
Plugging completed 6-14-68 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3610' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED			4 1/2"	3608'	1423.19'
	STATE CORPORATION COMMISSION			8 5/8"	193'	
	JUN 18 1968					
	CONSERVATION DIVISION					
	Wichita, Kansas					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3400'. Mixed and ran 4 sacks cement thru dump bailer.  
Squeezed hole with 17 sacks gel, followed with 100 sacks cement. Cement from 1170' to 850', followed with 15 sacks gel. Gel from 850' to 225', followed with 20 sacks cement. Cement from 225' to 165', followed with 3 sacks gel. Gel from 165' to 30'. Displaced with 10 sacks cement. Cement from 30' to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.  
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 17 day of June, 19 68

My commission expires October 1968

Sidney D. Miller Notary Public.

