


R

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

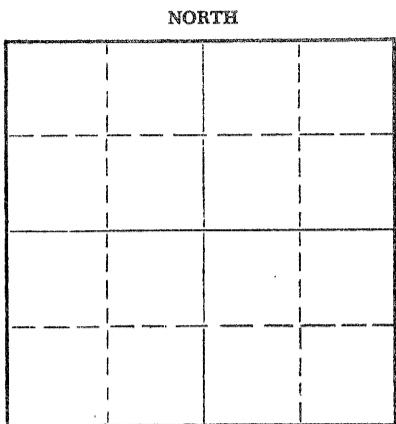

Locate well correctly on above Section Plat

PHILLIPS County, Sec. 29 Twp. 1 Rge. 18 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines C NW NW  
Lease Owner SPECTOR PIPE AND SUPPLY INC.  
Lease Name FISHER Well No. 1  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 2/4/60 19  
Application for plugging filed August 28, 1966 19  
Application for plugging approved August 29, 1966 19  
Plugging commenced SEPTEMBER 1, 1966 19  
Plugging completed SEPTEMBER 4, 1966 19  
Reason for abandonment of well or producing formation failure to produce profitably  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well MASSEY  
Producing formation Kansas City Depth to top 3419 Bottom 3638 Total Depth of Well 3650 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" od	231 ft.	none
				4 1/2" od	3651 ft.	1375.42

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged back with sand to 3400 feet and dumped 1/2 sacks of cement. Circulated mud at 600 feet and dumped 25 sacks of cement at 540 feet. Pumped 20 sacks at 220 feet and put 10 sacks on top.

RECORDED  
SEP 15 1966  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Lynch Casing Pulling Co. 457  
Address R. Rt. 4, Gt. Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Russell, ss.  
Spector Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 13th day of September, 19 66

My commission expires December 1, 1968

Elsie Coady  
Elsie Coady Notary Public.

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY  
505 East Murdock, Wichita, Kansas

COPY

Company- FELDT-MAYTAG & COMPANY  
Farm- Fisher No. 1

SEC. 29 T. 1 R. 18W  
C NW NW

Total Depth. 3650'

Comm. 1/27/60

Comp. 2/4/60

County Phillips


KANSAS

Shot or Treated.

Contractor. Leben Drilling, Incorporated.

Issued. 5/28/60

15-147-00413-00-00



CASING:

8 5/8" 231' w/150 sks.  
4 1/2" 3651

Elevation. 2227 RB

Production. 25 BOPD

Figures Indicate Bottom of Formations.

surface clay & shale	40
shale & sand	210
shale	231
shale, shells & sand	960
shale	1650
shale & shells	1807
anhydrite	1836
shale	1860
shale & lime	3426
lime	3475
shale & lime	3525
lime	3650
Total Depth	

TOPS:SCOUT

Heebner	3374
Toronto	3403
Lansing	3419
Base Kansas City	3638

RECEIVED  
STATE CORPORATION COMMISSION

AUG 29 1966

CONSERVATION DIVISION  
Wichita, Kansas