


15-147-00647-00 00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Phillips County. Sec. 4 Twp. 1S. Rge. (E) 18 (W)
Location as "NE/CNW/SW" or footage from lines NW NW NE
Lease Owner ALPINE OIL & ROYALTY CO., INC.
Lease Name Fischer Well No. B-1
Office Address 1100 Bitting Bldg. Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed December 10 19 51
Application for plugging filed April 18th 19 52
Application for plugging approved April 18th 19 52
Plugging commenced April 18th 19 52
Plugging completed April 18th 19 52
Reason for abandonment of well or producing formation No production
in paying quantities
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Kansas City Depth to top 3249 Bottom Total Depth of Well 3470 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	175'	cemented
				5 1/2"	3469'	2689'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back with crushed rock to 3325'. Dumped 4 sacks cement. Top of cement was 3297'. Mudded hole to 170'. Set rock bridge. Dumped 15 sacks of cement. Top of cement, 125'. Mudded hole to 35'. Set rock bridge and dumped 10 sacks cement for

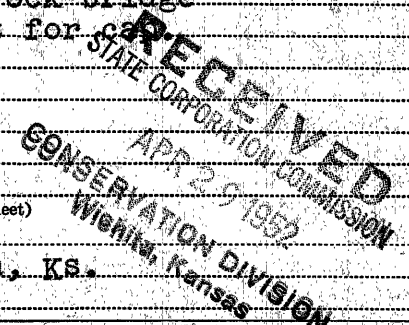

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor QUAKER DRILLING CO., INC.
Address 1100 Bitting Building Wichita, Ks.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Thomas M. McCaul (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Thomas M. McCaul
1100 Bitting Bldg. Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 25th day of April, 1952.
J. L. Brown Notary Public.

My commission expires March 7th, 1955 23-8390-s 6-51-20M

QUAKER DRILLING
BOOK PAGE 9 LINE 26

1574700647-00-00

WELL LOG

ALPINE OIL & ROYALTY CO., INC.	Elevation:	2040 R.B.
Contractor: Quaker Drilling Co., Inc.	Commenced:	12-3-51
Albert O. Fischer No. 1 NW NW NE Sec. 4-1S-18W Phillips County, Kansas	Completed:	12-10-51
	Production:	D & A

Casing Record:

Set 175' of 8 5/8" with 125 Sax.

(Figures indicate bottom of formations)

FORMATIONS:

FORMATION TOPS

Surface Clay and Sand	170
Shale (Blue)	480
Gray Shale and Sand Streaks	635
Blue Shale and Shells	724
Shale and Shells	1053
Sand	1080
Shale and Sand Streaks	1320
Sand	1380
Shale	1400
Shale and Shells	2080
Lime and Shale	3470 T.D.

Heebner	3223	-1182
Lansing	3249	-1268
T.D. (r)	3470	-1430

Set 5 1/2" @ 3469 w/125 sax

I hereby certify that the above is a true and correct copy of Drillers Log of well drilled in the NW NW NE of Section 4, Township 1 South, Range 18 West, Phillips County, Kansas.

ALPINE OIL & ROYALTY CO., INC.

By: [Signature]

Subscribed and sworn to before me this 18 day of April, 1951.

[Signature]
Notary Public

My Commission Expires:
March 7, 1955

RECEIVED
STATE CORPORATION COMMISSION
APR 29 1952
CONSERVATION DIVISION
FILE SEC 4 T 1 R 12
BOOK PAGE 9 LINE 26