

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-22426-00-00
Spot: W2E2NW Sec/Twnshp/Rge: 28-18S-25W
3960 feet from S Section Line, 3630 feet from E Section Line
Lease Name: FRITZLER A Well #: 5
County: NESS Total Vertical Depth: 4469 feet

Operator License No.: 31627
Op Name: WHITETAIL CRUDE, INC
Address: N HWY 283 PO BOX 544
NESS CITY, KS 67560

PROD Size: 5.5 feet: 1798 WITH 425 SX CMT
SURF Size: 8.625 feet: 617 WITH 250 SX CMT

#145²⁴

Well Type: SWD UIC Docket No: D24502.0 Date/Time to Plug: 02/12/2004 4:00 PM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: MIKE FRITZLER Company: WHITETAIL CRUDE Phone: (785) 798-3641

Proposed Plugging Method: PUMP 120 SX CMT & 300# HULLS. PRESSURE CHECK. PUMP 30 SX CMT DOWN BACKSIDE. PRESSURE TEST.

Plugging Proposal Received By: MICHAEL MAIER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 02/12/2004 4:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PBTD 1750'. PUMP 120 SX CMT & 300# HULLS. PRESSURED TO 500#. SHUT IN WITH 500#. TIED ONTO BACKSIDE AND PUMPED 30 SX CMT. PRESSURED TO 300# AND HELD.

Perfs:


Top	Bot	Thru	Comments
1245	1412		

RECEIVED
FEB 19 2004
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. NO CASING RECOVERED.

Plugged through: CSG

District: 01

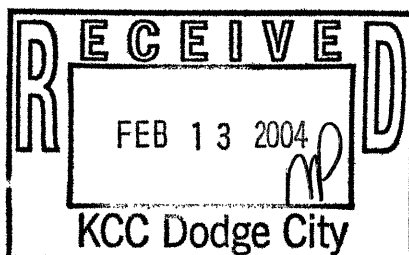

Signed

Michael Maier
(TECHNICIAN)

INVOICED

DATE 2-19-04
INV. NO. 2004061203

Form CP-2/3