

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24258-00-00
Spot: E2SENWSW Sec/Twnshp/Rge: 4-16S-23W
1740 feet from S Section Line, 1190 feet from W Section Line
Lease Name: WILLOUR Well #: 1-4
County: NESS Total Vertical Depth: 4540 feet

Operator License No.: 9855
Op Name: GRAND MESA OPERATING COMPANY
Address: 200 E. 1ST STREET N. STE 307 FRMRS
WICHITA, KS 67202

SURF Size: 8.625 feet: 226

\$147⁵⁵

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 02/06/2004 8:00 PM

Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.

Proposal Rcvd. from: TONY MARTIN Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: 1ST PLUG AT 1810' WITH 50 SX CMT. 2ND PLUG AT 1020' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 40 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 40-0' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT
Date/Time Plugging Completed: 02/06/2004 10:00 PM

Witness Type: NONE
KCC Agent: STEVE DURRANT

Actual Plugging Report:

Perfs:


1ST PLUG AT 1810' WITH 50 SX CMT. 2ND PLUG AT 1020' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 40 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 40-0' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

RECEIVED
FEB 26 2004
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

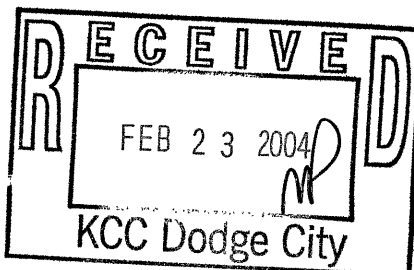

Signed

Steve Durrant
(TECHNICIAN)

INVOICED

2-26-04
INV. NO. *2004061227*