


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

15-147-20134-00-00 FORM CP-4
WELL PLUGGING RECORD

Phillips County, Sec. 15 Twp. 1 Rge. 18 (E) (W) X

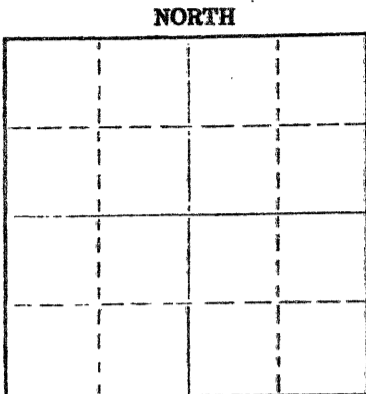

Locate well correctly on above Section Plat

Location as "NE/CNW/SE/SW" or footage from lines NE NE NE
 Lease Owner Leland R. Baird
 Lease Name Wolf Well No. #5
 Office Address Logan, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) _____
 Date well completed _____ 19____
 Application for plugging filed _____ 19____
 Application for plugging approved _____ 19____
 Plugging commenced 9-23-74 19____
 Plugging completed 10-2-74 19____
 Reason for abandonment of well or producing formation _____
 If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Leo Massey
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3550' Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3549'	2374.57'
				8 5/8"	216'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3350'. Mixed and ran 4 sacks cement thru dump bailer.
Squeezed hole with 3 sacks hulls - 7 sacks gel - 1 sack hulls - 70 sacks cement and 13 sacks gel. Released plug and displaced with 50 sacks cement.


RECEIVED
 STATE CORPORATION COMMISSION
 OCT 7 1974
 CONSERVATION DIVISION
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Southwest Casing Pulling Co.
 Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spence Sec.
Box 364 Great Bend, Kansas
 (Address)

Sworn to before me this 4 day of October, 19 74



24 October 1976

Sidney D. Miller
 Notary Public.

B & B DRILLING, INC.

2000 S. Main Street, Building 720 UNION CENTER
Wichita, Kansas 67202

September 14, 1971

DRILLERS LOG

15-147-20134-00-00
~~15-147-~~

Re: Leland R. Baird #5 Wolf
NE NE NE Section 15-16-18W
Phillips County, Kansas

OPERATOR: Leland R. Baird
CONTRACTOR: B & B Drilling, Inc.
COMMENCED: September 3, 1971
COMPLETED: September 10, 1971
TOTAL DEPTH: 3550'

Set 8 5/8" @ 216' w/140 sx

0	219	Surface Hole
216	690	Shale
690	1623	Shale & Sand
1623	1682	Shale
1682	1712	Anhydrite
1712	1985	Shale & Shells
1985	2297	Shale
2297	2518	Shale
2518	3065	Line & Shale
3065	33300	Line
3330	3375	Line
3375	3500	Line
3500	3550	Line
3550		Total Depth

DST #1 3325 - 3350'
DST #2 3350 - 3375'
DST #3 3375 - 3400'
DST #4 3470 - 3500'

Run 4 1/2" set @ 3549' w/ 235 sx

We certify the above and foregoing to be true and correct copy of the log on the #5 Wolf, located in Phillips County, Kansas

RECEIVED
OCT 20 1971

AUG 20 1971

CONSULTING ENGINEER
WICHITA, KANSAS

Bill Baker President

Alma A. Neises Notary Public
Subscribed and sworn to before me this 14th day of September, 1971. My commission expires May 31, 1974