

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-10016-00-01
Spot: SWNE Sec/Twnshp/Rge: 2-33S-30W
1992 feet from N Section Line, 1980 feet from E Section Line
Lease Name: STEVENS (MORROW UNIT) Well #: SMU-207
County: MEADE Total Vertical Depth: 5840 feet

Operator License No.: 32198
Op Name: PETROSANTANDER (USA) INC.
Address: 6363 WOODWAY STE. 350
HOUSTON, TX 77057

CIBP Size: feet: 5600 WITH 2 SX CMT
PROD Size: 5.5 feet: 5828 WITH 600 SX CMT
SURF Size: 9.625 feet: 1609 WITH 700 SX CMT

#18980

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/25/2004 9:00 AM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE
Proposal Rcvd. from: RON Company: PETROSANTANDER (USA) Phone: (713) 784-8700

Proposed Plugging Method: PULL 5-1/2" CASING TO APPROX. 2500'. PLUG @ 2500' W/40 SX. PLUG @ 1500' W/60 SX. PLUG @ 500' W/30 SX. PLUG @ SURFACE W/20 SX.

Plugging Proposal Received By: SCOTT ALBERG WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/26/2004 7:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PBTD 5781'. CASING LEAK @ 2875'-3268'. SQUEEZED. FLUID LEVEL @ 1400' +/-.
SET CIBP @ 5600' WITH 2 SX CMT ON TOP. SDON. 02/26/04: 1ST PLUG PUMP 300#
HULLS & 25 SX CMT @ 1880'. 2ND PLUG PULL OUT OF HOLE TO 1620'. CIRCULATE
HOLE WITH MUD & PUMP 60 SX CMT. GOOD CIRCULATION. 2ND PLUG PULL
OUT OF HOLE TO 500'. LOAD HOLE & PUMP 40 SX CMT. GOOD CIRCULATION.
3RD PLUG PULL OUT OF HOLE TO 40'. LOAD HOLE & PUMP 15 SX CMT TO
SURFACE.

Perfs:


Top	Bot	Thru	Comments
5684	5702		
5674	5677		

RECEIVED
MAR 04 2004
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 1900' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

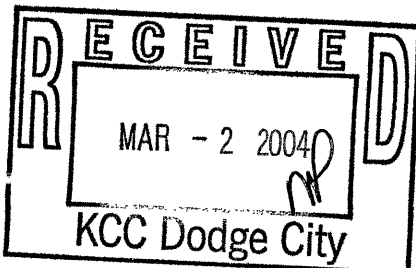

Signed

Jim Holland PART #
(ELECTRICIAN)

INVOICE
DATE 3-4-04
CV. NO. 2004061259