


15-147-30189-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Phillips County. Sec. 20 Twp 1S Rge. 18W (E) (W)
Location as "NE/CNW 1/4 SW 1/4" or footage from lines NW SE NE
Lease Owner Powell & Peters Drlg. Co., Inc.
Lease Name Hageman Well No. 1
Office Address American State Bank Bldg., Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 4, 1951 19
Application for plugging filed May 4, 1951 19
Application for plugging approved May 7, 1951 19
Plugging commenced May 4, 1951 19
Plugging completed May 4, 1951 19
Reason for abandonment of well or producing formation dry hole

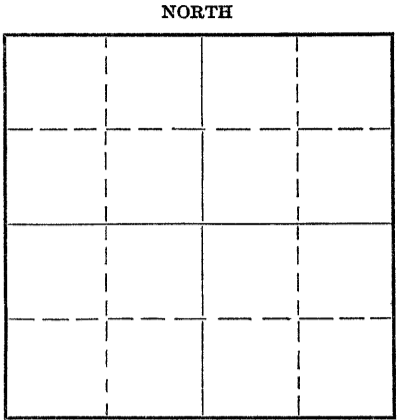

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production none 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3500 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	212.82'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Circulated hole with heavy mud. Pushed
plug to 180 feet. Displaced 15 sacks of
cement through drill pipe and filled with
heavy mud to 40 feet. Set wood plug 1/2
sack hulls and 10 sacks of cement to bottom
of cellar.

STATE CORPORATION COMMISSION
MAY 29 1951
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Powell & Peters Drilling Co., Inc.,
Address American State Bank Building
Great Bend, Kansas

STATE OF _____, COUNTY OF _____, ss.
(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) A. R. Peters

SUBSCRIBED AND SWORN TO before me this 28th day of May, 1951
(Address) Great Bend, Kansas

My commission expires 9/29/51 Notary Public.

PLUGGING
FILE SEC 20 T 28 R 16
BOOK PAGE 79 LINE 45

POWELL & PETERS DRILLING CO., INC.
American State Bank Building
Great Bend, Kansas

15-147-30189-00-00

Hageman No. 1

NE SE NE Sec. 20-15-18W
Phillips County, Kansas

Commenced R. D.: 4/24/51
Completed R. D.: 5/4/51
Total Depth: 3500'
Casing Record: 212.82' of 8 5/8" 8 Rd. Thd.

Elevation: 2194 D. F.
Initial Prod.: D & A
Contractor: Powell & Peters
Drilling Co., Inc.

Strata	Depth
Surface Soil & Clay	0 -92'
Sand and Shale	92 -180'
Blue Shale	180 -206'
Shale	206 -890'
Blue Shale	890 -1366'
Anhydrite	1366 -1410'
Red & Grey Shale	1410 -1600'
Shale & Shells	1600 -2340'
Lime	2340 -2560'
Shale & Shells	2560 -2775'
Shale & Lime	2775 -2855'
Shale & Shells	2855 -3070'
Shale & Lime	3070 -3156'
Lime	3156 -3500'

I hereby certify that the above is a true and correct log of said well as reflected by the daily drilling reports.

POWELL AND PETERS DRILLING CO., INC.

A. R. Peters
A. R. PETERS Vice-Pres.

Signed and sworn to in my presence this 11th day of May 1951, by A. R. Peters, Vice-President of the POWELL AND PETERS DRILLING CO., INC. a Corporation in the State of Kansas

Clayton Bell
Notary Public

My Commission expires February 16, 1955

RECEIVED
WATER CONSERVATION COMMISSION
MAY 14 1951
CONSERVATION DIVISION
Topeka, Kansas

PLUGGING
FILE SEC 20 T 1 R 18 W
BOOK PAGE 79 LINE 45

POWELL & PETERS DRILLING CO., INC.
 American State Bank Building
 Great Bend, Kansas

Hageman No. 1

NW SE NE Sec. 20-1S-18W
 Phillips County, Kansas

Commenced R. D.: 4/24/51
 Completed R. D.: 5/4/51
 Total Depth: 3500'
 Casing Record: 212.82' of 8 5/8" 8 Rd. Thd.

Elevation: 2194 D. F.
 Initial Prod.: D & A
 Contractor: Powell & Peters
 Drilling Co., Inc.

Strata	Depth
Surface Soil & Clay	0 - 92'
Sand and Shale	92 - 180'
Blue Shale	180 - 206'
Shale	206 - 890'
Blue Shale	890 - 1366'
Anhydrite	1366 - 1410'
Red & Grey Shale	1410 - 1600'
Shale & Shells	1600 - 2340'
Lime	2340 - 2560'
Shale & Shells	2560 - 2775'
Shale & Lime	2775 - 2855'
Shale & Shells	2855 - 3070'
Shale & Lime	3070 - 3156'
Lime	3156 - 3500'

I hereby certify that the above is a true and correct log of said well as reflected by the daily drilling reports.

POWELL & PETERS DRILLING CO., INC.

A. R. Peters
 A. R. PETERS Vice-Pres.

Signed and sworn to in my presence this 24th day of May 1951, by A. R. Peters, Vice-President of the POWELL AND PETERS DRILLING CO., INC. a Corporation in the State of Kansas

Dexter Miner
 Notary Public

My Commission expires 9/29/51

PLUGGING
 FILE SEC 20-1S-18W
 BOOK PAGE 79 45

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 29 1951
 CONSERVATION DIVISION
 Wichita, Kansas

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 26 1951
 CONSERVATION DIVISION
 Wichita, Kansas