

Renewal

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 15-097-10186-00-00 Comp. 10-16-62 (Identifier number of this well). This must be listed for wells drilled since 1967; If no API# was issued, indicate spud or completion date. 11/04

WELL OPERATOR LOTUS OPERATING CO., LLC. KCC LICENSE # 31980
(owner/company name) (operator's)

ADDRESS 914 East Douglas CITY Wichita

STATE Kansas ZIP CODE 67202 CONTACT PHONE # (316) 262-1077

LEASE Zimmerman "D" WELL # 1 SEC. 35 T. 27S R. 20W (East/West)

C - NW - NE SPOT LOCATION/QQQQ COUNTY Kiowa

4620 FEET (in exact footage) FROM (S) LINE OF SECTION (NOT Lease Line)

1980 FEET (in exact footage) FROM (E) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL GAS WELL D&A SWD/ENHR WELL DOCKET# _____

CONDUCTOR CASING SIZE _____ SET AT _____ CEMENTED WITH _____ SACKS

SURFACE CASING SIZE 8-5/8" SET AT 350' CEMENTED WITH 300 SACKS

PRODUCTION CASING SIZE 4-1/2" SET AT 4968' CEMENTED WITH 150 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: Perfs: 4862-66, 4867-76

ELEVATION 2279/2281 T.D. 4977' PBD _____ ANHYDRITE DEPTH 1260'
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD POOR CASING LEAK JUNK IN HOLE

PROPOSED METHOD OF PLUGGING _____ ACCORDING TO THE RULES AND REGULATIONS OF THE STATE OF KANSAS.

(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? No IS ACO-1 FILED? _____

If not explain why? _____ Completion Sheet Attached

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Tim Hellman PHONE# (316) 262-1077

ADDRESS 914 East Douglas City/State Wichita, Kansas 67202

PLUGGING CONTRACTOR Mike's Testing & Salvage Inc. KCC LICENSE # 31529
(company name) (contractor's)

ADDRESS P.O. Box 467 Chase, Kansas 67524 PHONE # () (316) 938-2943

PROPOSED DATE AND HOUR OF PLUGGING (If known?) _____ ASAP

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-110) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 2-26-04 AUTHORIZED OPERATOR/AGENT: Tim Hellman
(signature)

RECEIVED
FEB 27 2004
KCC WICHITA

10-200+
MAP NO. _____ SEC. 35 TWP. 27S RGE. 20W
STATE 1. Kans COUNTY Kiowa LOC. C NW NE
OPERATOR Walters Drlg. & Perry B. Ward, Et al FT. FROM _____ LINE _____
WELL NO. 1 FARM NAME Zimmerman "D" FT. FROM _____ LINE _____
POOL Wildcat ELEV. 2276 E GR 2279 E DF 2281 KB
FR. 8/21/62 SPUD 8/21/62 COMP. 10/16/62
CONT. Walters Drlg., Rig #1 /GEOLOGICAL _____
NAME PRODUCING INTERVAL COMPLETION RECORD TREATMENT RECORD
a Miss 4862-76 52 500 A
b _____
c _____
d State Pot; Pump
a I. P. OIL/DIST. 35 BO WTR. NW GAS _____ M.C.F.P.D. _____ CHK. _____ HRS. 24*
b " " " " " " " "
c " WC (2 miles So of Fralich (Miss) Pool) " " "
d _____

15-097-10186-00-00

D & A ()

SIPH _____ FI TP # _____ FI CP# _____ SIBHP _____
GOR. _____ GR. 35.9° PBTD _____ TD 4978
CASEMENT RECORD
SIZE DEPTH W/SAX. SIZE DEPTH W/SAX.
8 5/8" @ 350 300
4 1/2" @ 4968 150

OPERATOR Walters Drlg. & WELL NO. 1 Zimmerman "D" ELEV. 2281 KB


SAMPLE TOPS	DEPTH	SUB SEA	ELEC. TOPS	DEPTH	SUB SEA
KB Tops & Datums:					
Blaine	690	+1591			
Anhr	1260	+1021			
Hb	4080		Hb	4080	-1799
BL	4231		BL	4232	-1951
Lans	4241		Lans	4242	-1961
Miss-War	4846		BKc	4644	-2363
			Miss-War	4861	-2580
			Miss-Osage	4939	-2658
RTD	4977				
DST #1 (Miss War) 4865-80':			LTD (Osage) 4978 -2697		
Op 2 hrs, GTS/24", TSTM, R 300' CO (Grav 37 deg) + 480' MCO + 60' MSW, IBHP 1535#/30", IFP 105#, FFP 280#, FBHP 1470#/30".					
DST #2 (Miss) 4880-95': Op 1 hr, WB/31" & died, Flushed 45", WB/7" & died, R 64' M + SSO, IBHP 1535#/30", IFP 50#, FFP 75#, FBHP 1360#/30".					
RTD 4977 (Miss-Osage) Log, 4 1/2" @ 4968' w/150 sx, Perf 16'/4862-66 (Miss-Warsaw) FU 2580' Fluid/14 hrs. = 33 BO + 2 BW, Grv 35.7 deg, Swb 8 1/2 BO/5 hrs, FU 2700' Oil/14					

10-200 2
SHEET NO. _____ MAP NO. _____
STATE Kans COUNTY Kiowa SEC. 35 TWP. 27S RGE. 20W
OPERATOR Walters Drlg. & Perry B. Ward, Et al LOC. C NW NE
WELL NO. 1 FARM NAME Zimmerman "D"

hrs, + 1/2 Gal Wtr. Swb 25 3/4 BO/NT, Swb 1 1/3 BOPH/NW/
3 hrs, 500 MA + 112 BLO. Short 23 BL. Perf 36/4867-76
(Miss-Warsaw) Swb 2 1/2 BOPH/3 hrs w/tr Wtr. FU 2420'
Fluid/14 hrs. Swb 22 1/2 BO/NT. Swb 12 1/2 BO/8 hrs
w/tr Wtr. Swb 108 BNO + 5 1/2 BW/64 hrs. FU 2400' Fluid/
14 hrs. Swb 22 BO + 35 GAW/NT. T&R. POP. P 37 BOPD/NW
(Gravity 35.7 deg) State Pot; Pump 35 BOPD/NW, Grav.
35.9 deg, Miss 4862-76, 10/9/62.

COMPLETED

RECEIVED
FEB 27 2004
KCC WICHITA

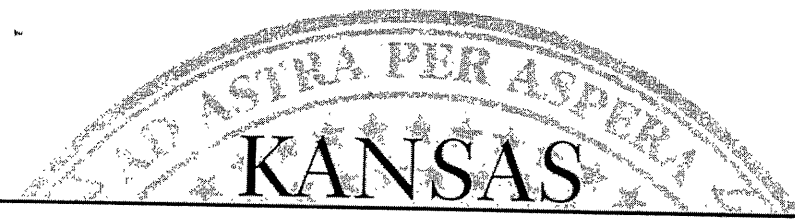

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair John Wine, Commissioner Robert E. Krehbiel, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Lotus Operating Company, L.L.C.
914 E Douglas
Wichita, KS 67202-3510

March 03, 2004

Re: ZIMMERMAN D #1
API 15-097-10186-00-00
NWNE 35-27S-20W, 4620 FSL 1980 FEL
KIOWA COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely


David P. Williams
Production Supervisor