

RECEIVED

FEB 25 2004

KCC WICHITA

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15-009-24,455-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date _____.

Well Operator: Tengasco Inc. KCC License #: 32278
Address: P.O. Box 458 City: Hays
State: Kansas Zip Code: 67601 Contact Phone: (785) 625-6374
Lease: Unruh Well #: 2 Sec. 30 Twp. 20 S. R. 15 East West
- SW - NW - NW Spot Location / QQQQ County: Barton

2/04

4290 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)
4950 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: None Set at: _____ Cemented with: _____ Sacks
Surface Casing Size: 8.625" Set at: 1062 Cemented with: 400 Sacks
Production Casing Size: 5.5 Set at: 3864 Cemented with: 75 Sacks

List (ALL) Perforations and Bridgeplug Sets: 3784-86; 3790-92; 3797-3800; 3804-07; Arbuckle

Elevation: 2054 (G.L. / K.B.) T.D.: 3865 P.B.T.D.: 3843 Anhydrite Depth: 1047-1073 (+1007- +981)
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Pump 50 foot plug above Arbuckle at 3784.
Spot 50 sxs. cmt. at 1040'; pull up to 550' and spot 50 sxs. cmt. Pull
out to 40' and spot 10 sxs. cmt.; Top off casing with cmt.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? Should be on file with the KCC.

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.


List Name of Company Representative authorized to be in charge of plugging operations: Ed Glassman
Tengasco Inc. Phone: (785) 625-6374
Address: P.O. Box 458 City / State: Hays, KS 67601
Plugging Contractor: Allied Cementing Co. KCC License #: NA 99996
Russell, KS 67665 (Company Name) (Contractor's)
Phone: (785) 483-2627

Proposed Date and Hour of Plugging (if known?): Will advise Dist. #4 of date and time.

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 02-20-2004 Authorized Operator / Agent: Ed Glassman
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

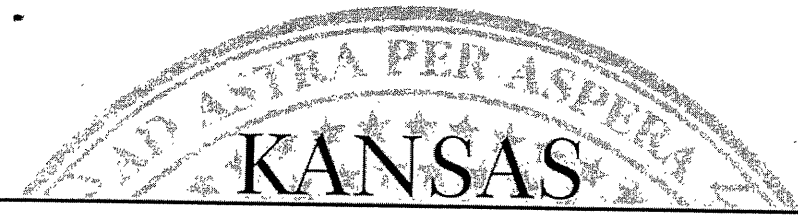

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair John Wine, Commissioner Robert E. Krehbiel, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Tengasco, Inc.
603 Main Ave., STE 500
Knoxville, TN 37902

March 02, 2004

Re: UNRUH #2
API 15-009-24455-00-00
SWNWNW 30-20S-15W, 4290 FSL 4950 FEL
BARTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #4
2301 E. 13th
Hays, KS 67601
(785) 625-0550

Sincerely

David P. Williams
Production Supervisor