

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

Form CP-1
September 2003
Form must be Typed
Form must be Signed
All blanks must be Filled

WELL PLUGGING APPLICATION

Please TYPE Form and File ONE Copy

API # 15- 189-22464 - 00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued.

Indicate original spud or completion date Spud 1/7/04

Well Operator: Anadarko Petroleum Corporation KCC License #: 4549
(Owner/Company Name) (Operator's)

Address: 1201 Lake Robbins Drive City: The Woodlands

State: TX Zip Code: 77380 Contact Phone: 832 636-3128

Lease: Schwalter A Well #: 3 Sec. 26 Twp. 31 R. 38 East West

S/2 SW NW NW Spot Location/QQQQ County Stevens

1100 Feet from (in exact footage) North / South (from nearest outside section corner) Line of Section (not Lease Line)

330 Feet from (in exact footage) East / West (from nearest outside section corner) Line of Section (not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # _____ ENHR Docket # _____ Other _____

RECEIVED
KANSAS CORPORATION COMMISSION
FEB 23 2004
CONSERVATION DIVISION
WICHITA, KS

Conductor Casing Size: N/A Set at: _____ Cemented with: _____

Surface Casing Size: 8-5/8" Set at: 1770' Cemented with: 545 Sacks

Production Casing Size: 5-1/2" Set at: 4911' Cemented with: 125 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perfs 4742'-4749'

Elevation: 3135' (G.L. K.B.) T.D. 6200' PBDT 4842' Anhydrite Depth _____
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Two sxs hulls and 20 sxs Class A cement from 4749'-4642'. Cut off 5-1/2" casing at about 4200'. Set Class A cement plugs at 1820' to 1651', 700' to 568', and 40' to 4'. Cut off casing at 4' below GL and cap well with steel cap.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? Logs will be submitted with ACO-1.

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission

List Name of Company Representative authorized to be in charge of plugging operations:

David Releford Phone: 620 482-1012

Address: 1707 W. 2nd City/State Liberal, KS 67901

Plugging Contractor Sargent & Horton Plugging, Inc. KCC License # 31151
(Company Name) (Contractor's)

Address Rt. 1, Box 49BA, Tyrone, OK 73951-9731 Phone: 405 854-6515

Proposed Date and Hour of Plugging (if known?): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent


Date: 2-20-04 Authorized Operator / Agent: Jerry N. Blossom
(Signature)

Jerry N. Blossom

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

8/04

1/05

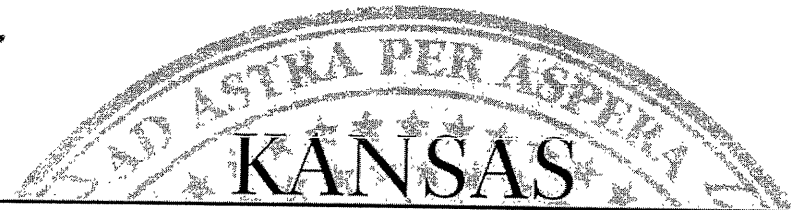

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair John Wine, Commissioner Robert E. Krehbiel, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Anadarko Petroleum Corporation
1201 Lake Robbins Drive
The Woodlands, TX 77380

February 24, 2004

Re: SCHOWALTER A #3
API 15-189-22464-00-00
S2SWNWNW 26-31S-38W, 1100 FNL 330 FWL
STEVENS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely

David P. Williams
Production Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888