

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION

Form CP-1  
September 2003  
Form must be Typed  
Form must be Signed  
All blanks must be Filled

WELL PLUGGING APPLICATION

Please TYPE Form and File ONE Copy

API # 15- 129-21494 - 00-01 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued.

Indicate original spud or completion date 2/16/97

Well Operator: Anadarko Petroleum Corporation KCC License #: 4549  
(Owner/Company Name) (Operator's)

Address: 1201 Lake Robbins Drive City: The Woodlands

State: TX Zip Code: 77380 Contact Phone: 832 636-3128

Lease: USA Barker "A" Well #: 2-H Sec. 23 Twp. 33 S R. 41  East  West

SW  
S/2 N/2 SE NW Spot Location/QQQQ County Morton

1850 Feet from (in exact footage)  North /  South (from nearest outside section corner) Line of Section (not Lease Line)

660 Feet from (in exact footage)  East /  West (from nearest outside section corner) Line of Section (not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other \_\_\_\_\_

RECEIVED  
KANSAS CORPORATION COMMISSION  
FEB 09 2004  
CONSERVATION DIVISION  
WICHITA, KS

Conductor Casing Size: N/A Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks

Surface Casing Size: 8-5/8" Set at: 1410' Cemented with: \_\_\_\_\_ Sacks

Production Casing Size: 5-1/2" Set at: 4330' Cemented with: \_\_\_\_\_ Sacks

List (ALL) Perforations and Bridgeplug Sets: 2140'-2149'

Elevation: 3320' ( G.L.  K.B.) T.D. \_\_\_\_\_ PBDT \_\_\_\_\_ Anhydrite Depth \_\_\_\_\_  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Pump 4 sxs hulls and 20 sxs Class H cement from 2160' to 2000'. Cut 5-1/2" casing at 1550'. Set Class H cement plug from 1500' to 1200'. Set cement plug from 100' to 4'. Cut 8-5/8" casing 4' below ground level and cap well with 1/4" steel cap.

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? Log was submitted with ACO-1.

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission

List Name of Company Representative authorized to be in charge of plugging operations:  
Darrel Smith Phone: 620 697-3619

Address: 1106 Sherman Ave. City/State Elkhart, KS 67950


Plugging Contractor Sargent & Horton Plugging, Inc. KCC License # 31151  
(Company Name) (Contractor's)

Address Rt. 1, Box 49BA, Tyrone, OK 73951-9731 Phone: 405 854-6515

Proposed Date and Hour of Plugging (if known?): \_\_\_\_\_

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 2-6-04 Authorized Operator / Agent: Jerry N. Blossom  
(Signature)  
/Jerry N. Blossom

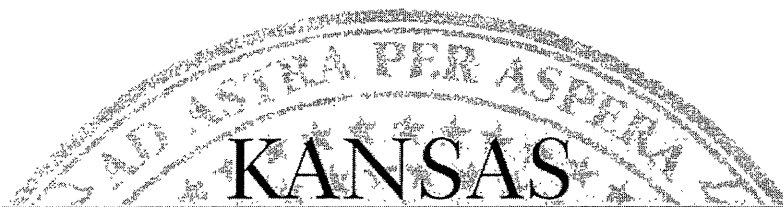

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    John Wine, Commissioner    Robert E. Krehbiel, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Anadarko Petroleum Corporation  
1201 Lake Robbins Drive  
The Woodlands, TX 77380

February 12, 2004

Re: USA BARKER A #2H  
API 15-129-21494-00-01  
S2N2SEW 23-33S-41W, 1850 FNL 1980 FWL  
MORTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely,

David P. Williams  
Production Supervisor

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888