


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

**-WELL PLUGGING RECORD**

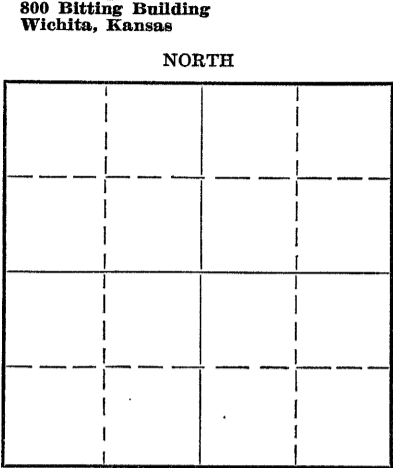

Locate well correctly on above  
Section Plat

Phillips County. Sec. 33 Twp. 1-S Rge 18 (E) (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NW SE  
Lease Owner Smitherman & Cohen  
Lease Name Ann Lowe Well No. 2  
Office Address El Dorado, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed July 28 19 52  
Application for plugging approved July 28 19 52  
Plugging commenced July 29 19 52  
Plugging completed July 31 19 52  
Reason for abandonment of well or producing formation  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation Depth to top Bottom Total Depth of Well 3570 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				7" OD	3569'	1301'
				10-3/4"	193'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole from 350' to 3180' and ran 5 sacks of cement. Mudded hole to 193', set rock bridge to 180' and ran 15 sacks of cement. Mudded hole to 25', set rock bridge and ran 10 sacks of cement. Plugging completed.

CONSERVATION DIVISION  
Aug 15, 1952

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor West Supply Company  
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.  
L. C. Smitherman (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *L. C. Smitherman*

(Address)

SUBSCRIBED AND SWORN to before me this 13th day of August, 19 52.

My commission expires March 3, 1955

Notary Public.

**PLUGGING**  
FILE SEC 33 T L R 180  
BOOK PAGE 37 LINE 5

15-147-19049-00-00

DRILLERS LOG

Operator: Honaker Drilling Company, Incorporated  
Lease: Ann Lowe #2, NW NW SE of Section 33-1-18W  
Phillips County, Kansas

Contractor: Honaker Drilling Company, Incorporated

	From	To
Shale & Shells	0	265
Reamed	0	195

Run 193.80' 10-3 4" surface pipe, cemented with 140 sacks cement, 300# CaCl.

Shale & Shells	195	1065
Sandy Shale	1065	1270
Shale & Shells	1270	1430
Sand	1430	1550
Red Bed & Shale	1550	1800
Shale & Shells	1800	1831
Anhydrite	1831	1857
Shale & Shells	1857	2110
Shale & Pyrite	2110	2625
Lime & Shale	2625	3155
Lime	3155	3570 T. D.

Run 125 joints, 3573.03' 7" pipe, set at 3567' with 175 sacks cement.

**PLUGGING**  
 FILE SEC 33 L R 18W  
 BOOK PAGE 37 LINE 5

STATE COMMISSION  
 AUG 15 1952  
 CONSERVATION DIVISION  
 Wichita, Kansas