


15-147-00075-00-00
WELL PLUGGING RECORD

STATE OF KANSAS
 STATE CORPORATION COMMISSION

Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 800 Bitting Building
 Wichita, Kansas

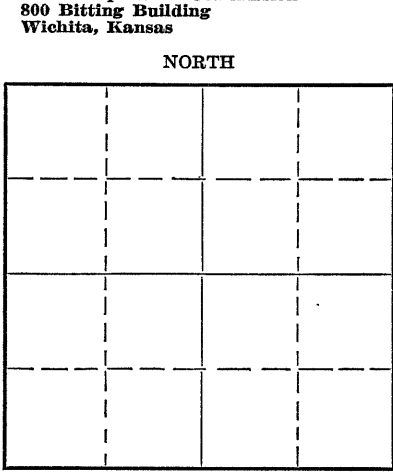

Locate well correctly on above
 Section Plat

Phillips County. Sec. 11 Twp. 1 Rge. 19 (E) (W)
 Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE/4 SW/4 NE/4
 Lease Owner Musgrove Petroleum, Corp.
 Lease Name Steenis Well No. 1
 Office Address Wichita, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed March 11 1951
 Application for plugging filed March 11 1951
 Application for plugging approved March 11 1951
 Plugging commenced March 11 1951
 Plugging completed March 11 1951
 Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
 Producing formation Depth to top Bottom Total Depth of Well 3520 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	205'	cemented W/125 sk

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 200'
 Bridge & plug @ 200'
 15 sacks Cement
 Heavy mud to 40'
 Bridge & plug @ 40'
 10 sacks Cement

RECEIVED
 STATE CORPORATION COMMISSION
 APR 24 1951
 CONSERVATION DIVISION
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Stearns Drilling Company
 Address Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
 O. G. Stearns (employee of owner) or (owner or operator) of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *O. G. Stearns*

SUBSCRIBED AND SWORN TO before me this 2nd day of April, 1951

(Address) Paul Patton
 Notary Public.

My commission expires June 20, 1953.

28-5091-s 8-50-10M
PLUGGING
 FILE SEC 11 T 1 R 19 W
 BOOK PAGE 67 12

STEARNS #1 15-147-00075-00-00

Operator: Musgrove et al
Contractor: Stearns Drilling Co.
Commencement Date: 2-27-51
Completion Date: 3-12-51

Location: SE/4 SW/4 NE/4, H-1-19,
Phillips County, Kansas.

Elevation: 2058 D. F.

Casing Record:
8-5/8" 205'
cemented w/125 sks.

Total:	
500'	0
1000'	0
1500'	15 min.
2000'	0
2500'	15 min.
3000'	15 min.

WELL LOG

surface clay and shale	0	205
shale	205	570
shale and sand	570	1300
sand	1300	1450
shale and shells	1450	1650
red rock	1650	1693
Anhydrite	1693	1718
red rock and shale	1718	1820
shale	1820	1900
shale and shells	1900	2100
shale	2100	2190
sand	2190	2250
lime and shale	2250	2950
lime	2950	2980
lime and shale	2980	3205
lime	3205	3520
Total Depth		3520

STATE OF KANSAS)
) SS
COUNTY OF RUSSELL)

RECEIVED
STATE CORPORATION COMMISSION
APR 24 1951
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that the above information is true and correct to the best of my knowledge.

O. G. Stearns
By: Ellen Krug, Sec. to O. G. S.

SUBSCRIBED AND SWORN to before me this 11 day of April, 1951.

PLUGGING
FILE SEC 11 T 1 R 19W
BOOK PAGE 67

Paul Dalton
Notary Public

My Commission Expires: June 20 1953