

RECEIVED  
MAR 04 2004  
KCC WICHITA

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**  
Please TYPE Form and File ONE Copy

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

API # 15-051-04970-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 9/20/47 spud date.

Well Operator: Lario Oil & Gas Company (Owner / Company Name) KCC License #: 5214 (Operator's) 6/04

Address: 301 S. Market City: Wichita

State: Kansas Zip Code: 67202 Contact Phone: (316) 265 - 5611

Lease: Marshall E Well #: 9 Sec. 24 Twp. 11 S. R. 18  East  West

SW - SE - SW Spot Location / QQQQ County: Ellis

330 Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)

1650 Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks

Surface Casing Size: 8 5/8", 32#, SS, 8V Set at: 1196' Cemented with: 525 sks. Sacks

Production Casing Size: 5 1/2", 14#, SS, 8rd Set at: 3529' Cemented with: 150 sks. Sacks

List (ALL) Perforations and Bridgeplug Sets: Perfs. 3501'- 03', 8 holes

Elevation: 1952' ( G.L. /  K.B.) T.D.: 3541' PBTD: 3505' Anhydrite Depth: \_\_\_\_\_ (Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Perforate @ 500', 1200' & 1950', 2 holes/ft. Run tubing to 2000'. Pump 100sk plug with hulls. Pull to 1200' & circulate cement to surface. If it falls back, pull to 500' and cement to surface. Will 325 sacks of 60/40 poz w/10% gel & 600# of cottonseed hulls on location.

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? Well drilled in 1947.

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Brad Sander / Tom Berens

Phone: (785) 623 - 0017 / 623 - 1419

Address: P. O. Box 784 City / State: Hays, Kansas

Plugging Contractor: Lario / Allied Cementing KCC License #: 99996 (Company Name) (Contractor's)


Address: P.O. Box 31 Russell, Kansas Phone: (785) 483 - 2627

Proposed Date and Hour of Plugging (if known?): \_\_\_\_\_

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 3-2-04 Authorized Operator / Agent: Brad Sander (Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

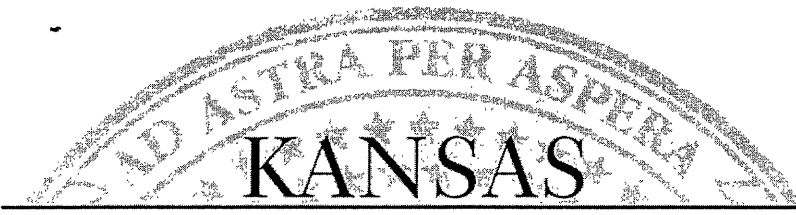

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Lario Oil & Gas Company  
301 South Market Street  
Wichita, KS 67202

March 08, 2004

Re: MARSHALL E #9  
API 15-051-04970-00-00  
SWSESW 24-11S-18W, 330 FSL 1650 FWL  
ELLIS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

District: #4  
2301 E. 13th  
Hays, KS 67601  
(785) 625-0550

Sincerely  
  
David P. Williams  
Production Supervisor