

STATE OF KANSAS
KANSAS CORPORATION COMMISSION
CONSERVATION DIVISION
130 South Market - Room 2078
Wichita, Kansas 67202

FORM CP-1 (3/92)

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 15-189-21033-00-01 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR Exxon Mobil Corporation KCC LICENSE # 5208
(owner/company name) (operator's)
ADDRESS PO Box 4358 CITY Houston
STATE Texas ZIP CODE 77210 CONTACT PHONE # () 713-431-1828

LEASE Wulfmeyer 1-A Unit WELL# 3 SEC. 11 T. 32 R. 35 (East West)
SE SE SPOT LOCATION/QQQQ COUNTY Stevens

600 FEET (in exact footage) FROM S N (circle one) LINE OF SECTION (NOT Lease Line)
600 FEET (in exact footage) FROM E W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL ___ GAS WELL XX D&A ___ SWD/EMHR WELL ___ DOCKET# ___

CONDUCTOR CASING SIZE ___ SET AT ___ CEMENTED WITH ___ SACKS
SURFACE CASING SIZE 8 5/8" SET AT 1724 CEMENTED WITH 779 SACKS
PRODUCTION CASING SIZE 5 1/2" SET AT 6280 CEMENTED WITH 605 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: Please see attached

ELEVATION 2920' T.D. 6280' PBD 3001' ANHYDRITE DEPTH ___
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD XXX POOR ___ CASING LEAK ___ JUNK IN HOLE ___

PROPOSED METHOD OF PLUGGING Please see attached / Per the rules **RECEIVED**
KANSAS CORPORATION COMMISSION

regulations of the KCC **MAR 05 2004**

(If additional space is needed attach separate page)

CONSERVATION DIVISION
WICHITA, KS

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? NO IS ACO-1 FILED? YES

If not explain why? ___

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Richard Lewis PHONE# () 316-544-5534

ADDRESS 200 W. 4th Street City/State Hugoton, KS 67951

PLUGGING CONTRACTOR Sargent & Horton KCC LICENSE # 31151
(company name) (contractor's)

ADDRESS Rt. 1, Box 49BA, Tyrone, KS 73951 PHONE # () 580-854-6515

PROPOSED DATE AND HOUR OF PLUGGING (if known?) ASAP

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 2-26-04 AUTHORIZED OPERATOR/AGENT: Celleen Rada
(signature)

RECEIVED
KANSAS CORPORATION COMMISSION
MAR 05 2004
CONSERVATION DIVISION
WICHITA, KS

PROPOSED PLUGGING PROCEDURE FOR EXXON MOBIL CORPORATION

WELL: WULFMEYER # 1-A UNIT # 3
FIELD: HUGOTON
COUNTY: STEVENS

THIS IS A CATEGORY III WORKOVER.

BOPE SPECIFICATIONS:

15-189-21033-00-00

NOTE: PERFORM ALL WELL WORK OPERATIONS IN ACCORDANCE WITH THE HPO WORKOVER OPERATIONS MANUAL.

NOTE: USE CLASS 'H', 16.4 PPG, 1.06 YIELD CEMENT FOR ALL PLUGS.

NOTE: PUMP 9.5 PPG MUD LADEN FLUID BETWEEN CEMENT PLUGS.

NOTE: NOTIFY KCC DISTRICT OFFICE IN DODGE CITY, KS PRIOR TO COMMENCEMENT OF WORK & WITHIN SUFFICIENT TIME TO WITNESS PLUGGING OPERATIONS.

NOTE: ENSURE PLUGGING FORMS HAVE APPROPRIATE INFORMATION NEEDED TO FILE APPROPRIATE PAPERWORK W/ THE KCC TO CONCLUDE PLUGGING OPERATIONS.

Check pressures on all casing strings daily and document on morning reports. Discuss safe blow down/well kill procedures with Exxon Mobil Workover Supervisor.

1. INSPECT JOBSITE FOR POTENTIAL HAZARDS & LOCATION CHARACTERISTICS THAT MAY IMPACT THE PLANNED WELLWORK AND/OR REQUIRE MODIFICATION OF THE PROCEDURE. INITIATE MOC PROCESS IF NEEDED.
2. SET & TEST RIG ANCHORS AS NEEDED.
3. **PLUG WELL AS DIRECTED BY KCC DISTRICT REPRESENTATIVE.** A GENERAL PLAN IS AS FOLLOWS, BUT SHOULD BE REVISED TO ENSURE ALL FORMATIONS (INCLUDING THE CHEYENNE FORMATION, DAKOTA FORMATION, ARBUCKLE FORMATION, ANY SALT FORMATIONS & ANY FRESH & USABLE WATER ZONES) ARE ISOLATED AS PER THE SPECIFICATIONS OF THE KCC.
4. MIRU.
5. RIH W/ WORKSTRING TO 3001' (CIBP @ 3001').
6. CIRCULATE 9.5 PPG MUD.
7. SET 80 SX CEMENT PLUG FROM 2400' - 3001'.
8. POH W/ WORKSTRING TO 2000'. REVERSE OUT.
9. WOC. TEST 5 1/2" CSG TO 500 PSI. (NOTE: IF CSG DOES NOT TEST, LOCATE CSG LEAK(S) & OBTAIN APPROVALS TO ISOLATE LEAK(S).)
10. POH W/ WORKSTRING.
11. NIPPLE UP ON 5 1/2" CSG. RU JACKS.
12. SET BOP'S W/ 5 1/2" PIPE RAMS & TEST.
13. RU WL UNIT W/ CLASS II LUBRICATOR & TEST. CUT 5 1/2" CSG @ 1774'. RD WL UNIT.
14. CIRCULATE & CONDITION MUD.
15. RECOVER 5 1/2" CSG.
16. CHANGE BOP RAMS TO 2 3/8" TBG.
17. RIH W/ 2 3/8" TBG WORKSTRING TO 1774'.
18. SET 240 SX CEMENT PLUG FROM 3' - 1774'.



RECEIVED
KANSAS CORPORATION COMMISSION

MAR 05 2004

CONSERVATION DIVISION
WICHITA, KS

19. POH W/ WORKSTRING.
20. REMOVE BOP'S.
21. CUT & CAP WELL 3' BELOW GROUND LEVEL.
22. RD/MO.

2/26/04

MAR 05 2004

CONSERVATION DIVISION
WICHITA, KS


PRELIMINARY B&A SKETCH-PLUGS WILL CHANGE PER THE DIRECTIONS OF THE KCC DISTRICT REPRESENTATIVE

COMPANY: Exxon Mobil Oil Corporation
WELL NAME: Wulfmeyer 1-A Unit
WELL #: 3
API#: 15-189-21033
COUNTY: Stevens

| SURFACE CASING | | | |
|-------------------|---------|-------|--------|
| OD | WT / FT | GRADE | SET AT |
| 8 5/8" | 24 | K-55 | 1724' |
| PRODUCTION CASING | | | |
| OD | WT / FT | GRADE | SET AT |
| 5 1/2" | 14 | K-55 | 6280' |
| TUBING | | | |
| OD | WT / FT | GRADE | SET AT |
| NONE | | | |


| CAPACITIES (BBL/FT) | |
|---------------------|---------|
| 2 3/8" TBG | 0.00387 |
| 5 1/2" CSG | 0.0240 |
| 2 3/8" x 5 1/2" | 0.0186 |
| 8 5/8" CSG | 0.0636 |

BEFORE

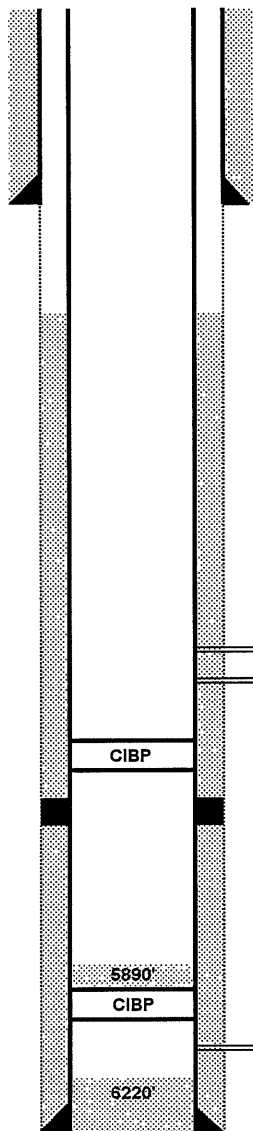

AFTER

CUT & CAP WELL @ 3' BELOW GROUND LEVEL.
PLUG # (2) 3' - 1774'

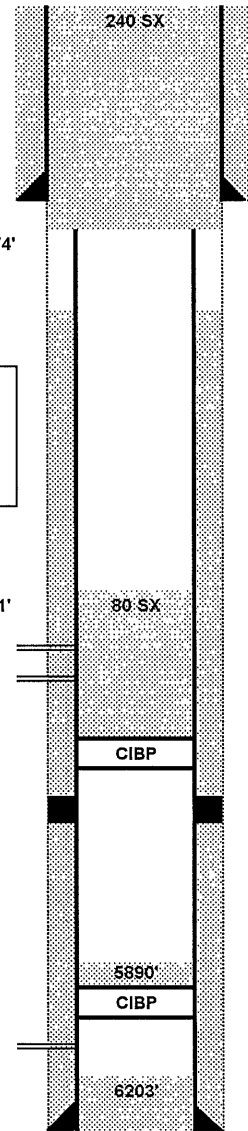

8 5/8" OD SURFACE CSG SET @ 1724'

CUT 5 1/2" CSG @ 1774'

CALC TOC @ 2000'

****PLUGS WILL NEED TO BE SET ACROSS THE FOLLOWING FORMATIONS:
CHEYENNE, DAKOTA, ARBUCKLE,
ANY SALT ZONES, ANY FRESH WATER ZONES**

2625' - 35', 2640' - 46'

2670' - 90', 2715' - 35'

CIBP @ 3001'

DV TOOL @ 3198'
(CEMENTED W/ 285 SX / 7 7/8" HOLE)

CIBP @ 5900' W/ 10' CMT ON TOP
6055' - 6075'

PLUG # (1) 2400' - 3001'

5 1/2" OD PRODUCTION CSG SET @ 6280'
(CEMENTED W/ 605 SX / 7 7/8" HOLE)

TD @ 6300'

TD @ 6300'

KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair John Wine, Commissioner Robert E. Krehbiel, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

EXXONMOBIL Oil Corp
14950 Heathrow Forrest Parkway
PO Box 4358
Houston, TX 77210-4358

March 08, 2004

Re: WULFEMEYER 1-A UNIT #3
API 15-189-21033-00-01
SESESE 11-32S-35W, 600 FSL 600 FEL
STEVENS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely



David P. Williams
Production Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888