

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas


WELL PLUGGING RECORD

15-147-20063-00-00

Phillips County, Sec. 30 Twp. 1 Rge. 18 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SW SW
Lease Owner Red Barron Productions
Lease Name Brockett Well No. 1
Office Address Box 55, Phillipsburg, Kansas 67661
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed February 17, 19 69
Application for plugging filed February 17, 19 69
Application for plugging approved February 17, 19 69
Plugging commenced February 17, 19 69
Plugging completed February 17, 19 69
Reason for abandonment of well or producing formation D&A

NORTH

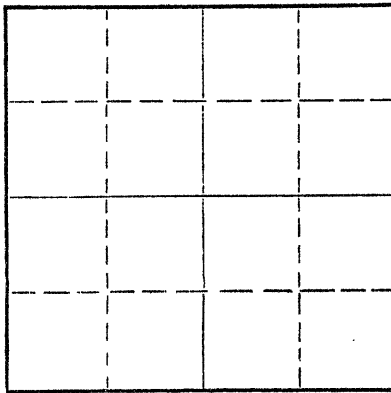

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3580 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	218.12'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set plug @ 600' w/50
sx cement. Set plug
@ 200' w/25 sx cement.
Set plug @ 40' w/1/2 sx
hulls & 10 sx cement.



(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202


STATE OF Kansas, COUNTY OF Sedgwick, ss.
Norman E. Klein (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Norman E Klein
1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of February, 19 69

Gloria Sawcett
Notary Public.

My commission expires 10-25-72



15-147-20063-00-00
DRILLERS LOG

No. 1 Brockett

CASING RECORD: 8 5/8" @ 226'
w/145 sx cement

COMPANY: Red Barron Productions

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: February 10, 1969

COMPLETED: February 17, 1969

TOTAL DEPTH: 3580'

DESCRIPTION: SE SW SW
30- 1S 18W
Phillips County,
Kansas

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay, Post Rock	0	70	
Sand, Shale	70	235	
Shale	235	1798	
Anhydrite	1798	1822	
Shale	1822	2130	
Shale & Shells	2130	2410	
Shale & Lime	2410	3100	
Lime	3100	3580	

RECEIVED
STATE CORPORATION COMMISSION
MAR 12 1969
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Norman E. Klein
Norman E. Klein

Subscribed and sworn to before me this 20th day of February, 1969.

Gloria Sawcette
Notary Public

My Commission Expires:
10-25-72