


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

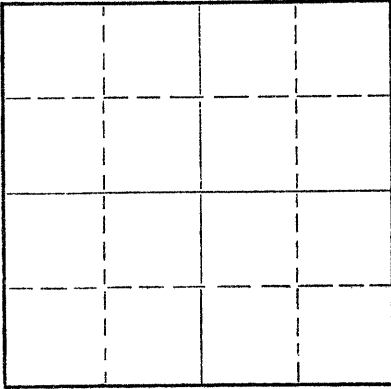

Locate well correctly on above Section Plat

Phillips County, Sec. 30 Twp. 1 Rge. 18 (E) (W) x

Location as "NE/CNW%SW%" or footage from lines NW NW SE

Lease Owner Sierra Petroleum Co.

Lease Name Rakestraw Well No. #1

Office Address Box 232, Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 8-18-66 19

Application for plugging approved 19

Plugging commenced 9-2-66 19

Plugging completed 9-14-66 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo F. Massey

Producing formation Depth to top Bottom Total Depth of Well 3601' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

RECEIVED
STATE CORPORATION COMMISSION
SEP 19 1966
CONSERVATION DIVISION
WICHITA, KANSAS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3425', mixed and ran 3 sacks cement thru dump bailer.
Squeezed hole with 20 sacks gel and 75 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.

Box 364, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 16 day of September, 19 66

Sidney D. Miller Notary Public.

My commission expires 24 October 1968

15-147-00415-00-00


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
500 East Main Street, Wichita, Kansas

Company- FELDT & MAYTAG
Farm- Rakestraw No. 1

SEC. 30 T. 1 R. 18W
NW NW SE

Total Depth. 3601'
Comm. 2-23-59 Comp. 3-3-59
Shot or Treated.
Contractor. Lewis Drlg. Co.
Issued. 5-30-59

County Phillips
KANSAS



Elevation. 2170' KB

Production. 25 BOED

CASING:

8 5/8" @ 213'
4 1/2" @ 3594'

Figures Indicate Bottom of Formations.

post rock	15
post rock & shale	213
shale	1100
red bed & shale	1350
sand	1455
shale & red bed	1750
chalk	1760
anhydrite	1730
red bed & shale	1830
shale & lime strks.	2110
lime & shale	3350
lime	3400
lime & chert	3423
lime	3504
lime & shale	3601
Total Depth	

TOPS:

Heebner	3316
Toronto	3347
Lansing/Kansas City	3364
Base/Kansas City	3501

RECEIVED
STATE CONSERVATION COMMISSION

SEP 20 1966

CONSERVATION DIVISION
Wichita, Kansas