

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217


15-147-20042-00-00

FORM CP-4

WELL PLUGGING RECORD

Phillips County, Sec. 22 Twp. 1 Rge. 18 (E) (W)X

NORTH

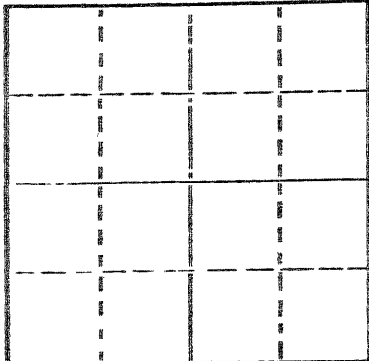

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines NE NW NE
 Lease Owner Leland R. Baird
 Lease Name Kent "G" Well No. #2
 Office Address Logan, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) _____
 Date well completed _____ 19____
 Application for plugging filed _____ 19____
 Application for plugging approved _____ 19____
 Plugging commenced 9-20-74 _____ 19____
 Plugging completed 10-2-74 _____ 19____
 Reason for abandonment of well or producing formation _____
 If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Leo Massey
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3552' Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3550'	2719.45'
				8 5/8"	211'	

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 7 1974
 CONSERVATION DIVISION
 WICHITA, KANSAS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or means used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Made bottom hole plug back with sand to 3325'. Mixed and ran 4 sacks cement thru dump bailer.
 Squeezed hole with 3 sacks hulls - 17 sacks gel, 1 sacks hulls - 70 sacks cement and 13 sacks gel. Released plug and displaced with 50 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.
 Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
 (Address)



SUBSCRIBED AND SWORN to before me this 4 day of October, 19 74
Sidney D. Miller
 Notary Public.

DRILLERS LOG

15-147-20042-00-00

No. 2 Kent "G"

CASING RECORD: COMPANY: Leland Baird DESCRIPTION:
 8 5/8" @ 211' CONTRACTOR: Red Tiger Drilling Co. NE NW NE
 w/260 sx cement COMMENCED: August 9, 1968 22-18-18W
 4 1/2" @ 3549' COMPLETED: August 17, 1968 Phillips Co., Ks.
 w/200 sx cement ELEVATION:
 TOTAL DEPTH: 3550'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Sand	0	175	
Shale	175	1250	
Shale & Sand	1250	1705	
Anhydrite	1705	1715	
Shale & Shells	1715	2250	
Lime & Shale	2250	3135	
Lime	3135	3550	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Norman E. Klein
 Norman E. Klein

Subscribed and sworn to before me this 22nd day of August, 1968.

Betty M. Maloney
 Notary Public

My Commission Expires:

3-22-71