


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

15-~~137~~-20018-00-00

Phillips 147 County, Sec. 35 Twp. 1 Rge. (E) (W) 20

NORTH

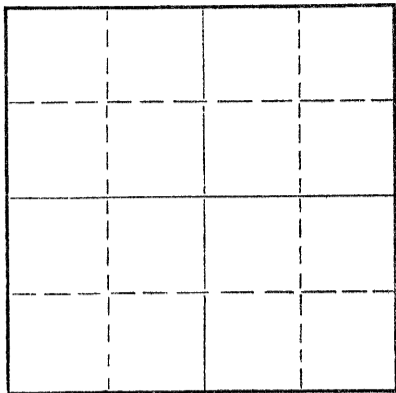

Locate well correctly on above  
Section Plat

Location as "NE/CNW/SW" or footage from lines NW SW  
Lease Owner ~~XXXXXXXXXX~~ National Associated Petroleum Co.  
Lease Name Oda H. Bock Well No. 1  
Office Address 4th Floor Petroleum Bldg., Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) dry  
Date well completed 10-31-67 19  
Application for plugging filed 10-31-67 19  
Application for plugging approved 10-31-67 19  
Plugging commenced 10-31-67 19  
Plugging completed 10-31-67 19  
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well  
Producing formation Depth to top Bottom Total Depth of Well 3840 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 990' with 100 sacks cement  
@ 280' with 35 sacks cement  
fill up - 2 sacks cement in rat hole.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 21 1967  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Thoroughbred Drilling Co.  
Address Box 151 Great Bend, Kansas

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.  
Daniel W. Brown (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Daniel W. Brown*  
Petroleum Building, Tulsa, Oklahoma  
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of December, 19 67

My commission expires February 21, 1969  
Maxine D. Provine Notary Public.

# Thoroughbred DRILLING COMPANY

Daniel W. Brown  
 4th Floor Petroleum Bldg.  
 Tulsa, Okla.  
 AC 918 582-1181

12-20-67

Charles Harre  
 Box 151  
 Great Bend, Kansas


147  
 15-~~187~~-20018-00-00

ODA HOY BOCK #1  
 35-1-20W  
 Phillips Co., Kansas

National Associated Petroleum Co.  
 4th Floor Petroleum Bldg.  
 Tulsa, Oklahoma

0'	-	50'	Sand Clay
50'	-	1010'	Sh. & Shells
1010'	-	1105'	Sand
1105'	-	1420'	Sh. & shells
1420'	-	1530'	Sand
1530'	-	1818'	Shale
1818'	-	1845'	Anhydrite
1845'	-	2105'	Red Bed & Shale
2105'	-	2580'	Shale
2580'	-	3020'	Shale
3020'	-	3385'	Shale & Lime
3385'	-	3840'	Lime

Thoroughbred Drilling Co.



Daniel W. Brown

RECEIVED  
 STATE CORPORATION COMMISSION  
 DEC 21 1967  
 CONSERVATION DIVISION  
 Wichita, Kansas