


15-039-20288-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Commission

P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

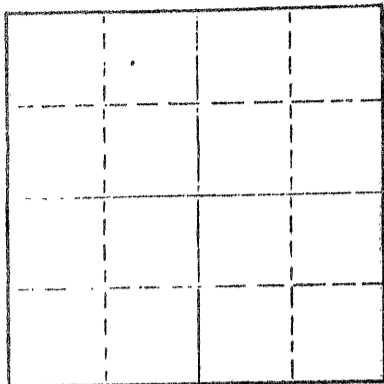

Locate well correctly on above  
Section Plat

Decatur County. Sec 10 Twp 1 Rge 26 (E) (W)  
Location as "NE/CNW/SE" or footage from lines. C E/2 SE/4 NW/4  
Lease Owner A. L. Abercrombie, Inc.  
Lease Name Huff E#1 Well No.  
Office Address Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 11/18/74 19  
Plugging completed 11/21/74 19  
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Nichols  
Producing formation Depth to top Bottom Total Depth of Well 3595 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	241	none
				4 1/2"	3382	1116'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, pushed plug to 3200' with 25' sand and 3 sacks cement. Cut poor boy head off, shot pipe at 1727', 1524', 1405', 1325', 1207', 1121', pulled 28 joints. Plugged well with 3 sacks hulls, 35 sacks gel and 150 cu. ft. 50-50 poz, 6% gel.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 13 1974  
CONSERVATION DIVISION  
Wichita, Kansas

12-13-1974

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KELSO CASING PULLING  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
CHASE, KANSAS  
(Address)

Subscribed and sworn to before me this 5th day of December, 1974

Margaret Melcher  
Notary Public.

