

15-039-20182-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Decatur County, Sec. 3 Twp. 1S Rge. 26 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines SW NE

Lease Owner Aylward Drilling Company

Lease Name Fossler Well No. 1

Office Address 909 First National Bank Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D&A

Date well completed September 21, 1970

Application for plugging filed September 21, 1970

Application for plugging approved September 21, 1970


Plugging commenced September 21, 1970

Plugging completed September 21, 1970

Reason for abandonment of well or producing formation D&A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

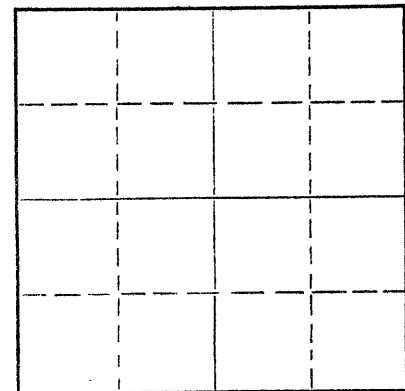

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3620 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	244.18'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- Plug @ 1125' w/75 sx cement
- Plug @ 275' w/25 sx cement
- Plug @ 40' w/10 sx cement
- Plug rathole - 50-50 pozmix
- 6% total gel.

RECEIVED
STATE CORPORATION COMMISSION
SEP 25 1970
CONSERVATION DIVISION
Wichita, Kansas

9-25-70

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company

Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Jim Farrice (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Farrice

1720 Wichita Plaza, Wichita, Kansas 67202

(Address)

SWORN TO before me this 23 day of September, 1970



My commission expires July 23, 1974

Notary Public.

15-039-20182-00-00

DRILLERS LOG

No. 1 Fossler

CASING RECORD:

COMPANY: Aylward Drilling Company

DESCRIPTION:

8 5/8" @ 250'
w/200 sx cement

CONTRACTOR: Red Tiger Drilling Company

SW NE

COMMENCED: September 14, 1970

3-1S-26W

COMPLETED: September 21, 1970

Decatur County,
Kansas

TOTAL DEPTH: 3620'

ELEVATION:

FORMATION

FROM

TO

REMARKS

Clay	0	40	
Shale & Shells	40	230	
Shale	230	1080	
Sand	1080	1200	
Shale	1200	1680	
Sand & Shale	1680	1833	
Shale & Red Bed	1833	2009	
Anhydrite	2009	2035	
Shale	2035	2440	
Lime & Shale	2440	2585	
Lime	2585	2870	
Lime & Shale	2870	3210	
Lime	3210	3620	

RECEIVED
STATE CORPORATION COMMISSION
SEP 25 1970
CONSERVATION DIVISION
Wichita, Kansas
9-25-1970

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jim Farrice
Jim Farrice



Subscribed and sworn to before me this 23 day of September, 1970.

Virginia K. Albert
Notary Public

My Commission Expires:

July 23, 1974