


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

15-039-20143-00-01

Form CP-4

WELL PLUGGING RECORD

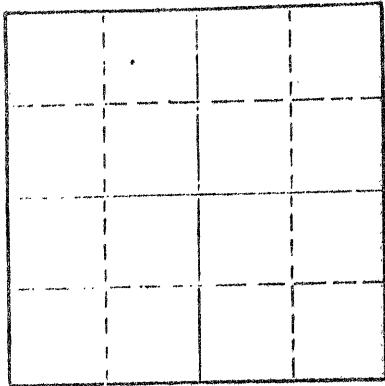

Locate well correctly on above
Section Plat

Decatur County, Sec. 20 Twp. 1 Rge. 26 (E) (W)
Location as "NE/CNW/SE/SW" or footage from lines 440 NL 440 WL NW/4
Lease Owner TGT Petroleum Corporation
Lease Name Hover #1 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 7/22/74 19
Plugging completed 7/31/74 19
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation Depth to top Bottom Total Depth of Well 3360 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	309	none
				4 1/2"	3350	1197

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, pushed plug to 3000' and ran 10' sand and 3 sacks cement. Loaded hole, shot pipe at 2507', 2311', 2017', 1790', 1495', 1398', 1300', 1203', pulled 37 joints. Pumped 100 110 sacks cement, 1 sack hulls and 30 sacks gel.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
AUG 15 1974
08-15-1974
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KELSO CASING PULLING
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
R. DARBELL KELSO (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darbell Kelso
CHASE, KANSAS

SUBSCRIBED AND SWORN to before me this 14th day of August, 1974 (Address)

Margaret Melcher
Notary Public.

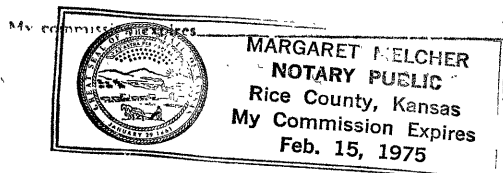

CONTRACTOR'S WELL LOG

15-039-20143-00-01

RECEIVED
STATE CORPORATION COMMISSION
06-06-1974
JUN 6 1974
CONSERVATION DIVISION
Wichita, Kansas

OPERATOR:	T G T PETROLEUM CORPORATION
CONTRACTOR:	ABERCROMBIE DRILLING, INC.
WELL NAME:	HOOVER #1 (Washdown)
LOCATION:	NW NW NW Sec. 20-1S-26W Decatur County, Kansas
GEOLOGIST:	Charles Spradlin
SPUD DATE:	April 26, 1974
COMPLETION DATE:	May 2, 1974

0	1149	Drilling cement plugs in old hole and washing down.
1149	1582	Cement
1582	1685	Sand
1685	1905	Shale
1905	1933	Anhydrite
1933	2098	Shale
2098	3305	Lime and Shale
3305	3360	Lime
	3360	Rotary Total Depth

Washed down to 1445'; unable to stay in old hole, drilled new hole.
 Ran 104 joints 4 1/2" J-55, 9 1/2# Casing. Set @3362' with 50 sacks posmix and 100 sacks of common cement, 12# gilsonite per sack, 10% salt and 2% gel.
 Job completed @ 11:00 a.m., May 2, 1974.

NOTE: This is a washdown of Okmar Oil Company's Hoover #1


STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jerry A. Langrehr, Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the HOOVER #1, NW NW NW, Section 20-1S-26W, Decatur County, Kansas.

ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr
 Jerry A. Langrehr
 Vice President

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 6th day of May, 1974.



My Commission Expires: 2-10-75

Beverly Mann
 Beverly Mann - Notary Public