

RECEIVED

APR 08 2004

KCC WICHITA

15-007-01267-00-01

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

WELL PLUGGING APPLICATION

Please TYPE Form and File ONE Copy

Form CP-1
September 2003

This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - Not available (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date 10/55

Well Operator: Herman L. Loeb KCC License #: 3273
(Owner / Company Name) (Operator's)

Address: P O Box 524 City: Lawrenceville

State: IL Zip Code: 62439 Contact Phone: (812) 853 - 3813

Lease: Newkirk, W.A. Well #: 16 Sec. 20 Twp. 33 S. R. 11 East West

NE - NE - SW Spot Location / QQQQ County: Barber

2200 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

~~2200~~ 3080 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # D-19,460 ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8 5/8" Set at: 259' Cemented with: 250 Sacks

Production Casing Size: 5 1/2" Set at: 4,606' Cemented with: 250 (top of cement 3147') Sacks

List (ALL) Perforations and Bridgeplug Sets: Perforations: 4512-42', 4055-75' PBTD: 4565'

Elevation: 1374' (G.L. / K.B.) T.D.: 4606' PBTD: 4565' Anhydrite Depth: _____
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Pressure test casing. Pull tubing & Baker tension pkr. Run tbg to spot cement across perms for bottom plug. Shoot casing off at free point (top of cement 3147' from temperature log). Pull casing & plug through casing or run tbg to plug as per KCC. Note: If well backflows, we will set a CIBP for a bottom plug.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? Copies of well logs will be faxed upon request.

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Alan Vratil or M L Cox

Phone: (620) 886 - 2419

Address: _____ City / State: Medicine Lodge, KS

Plugging Contractor: Clarke Corporation KCC License #: 5404 5105
(Company Name) (Contractor's)

Address: P O Box 107 Medicine Lodge, KS 67104 Phone: (620) 886 - 5665

Proposed Date and Hour of Plugging (if known?): April 8, 2004


Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 4/5/04 Authorized Operator / Agent: *George A. Payne*
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

2/05

6/04

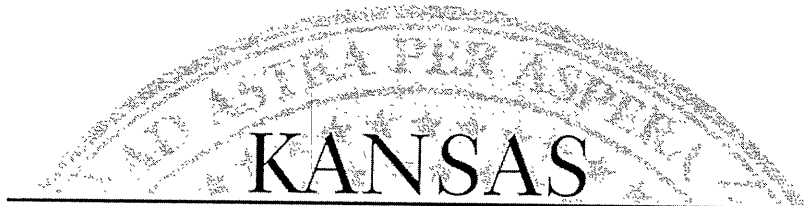

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair John Wine, Commissioner Robert E. Krehbiel, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Loeb, Herman L.
PO Box 524
Lawrenceville, IL 62439

April 14, 2004

Re: W A NEWKIRK #16
API 15-007-01267-00-01
NENESW 20-33S-11W, 2200 FSL 3080 FEL
BARBER COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely

David P. Williams
Production Supervisor