

RECEIVED
JAN 14 2004
KCC WICHITA

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 083-21,447-01 00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 9/20/62

10/04

Well Operator: HARTMAN OIL CO., INC. KCC License #: 30535
(Owner / Company Name) (Operator's)

Address: 12950 E. 13th ST. City: WICHITA

State: KANSAS Zip Code: 67230 Contact Phone: (316) 636 - 2090

Lease: BILLINGS Well #: #1 Sec. 3625 Twp. 22 S. R. 23 East West

-e SW SE SW NE NW Spot Location / QQQQ County: HODGEMAN

660 205 Feet (in exact footage) From North South (from nearest outside section corner) Line of Section (Not Lease Line)

1980 1458 Feet (in exact footage) From East West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: N/A Set at: N/A Cemented with: N/A Sacks

Surface Casing Size: 8-5/8" Set at: 279' Cemented with: 200 Sacks

Production Casing Size: 5-1/2" Set at: 4500' Cemented with: 100 Sacks

List (ALL) Perforations and Bridgeplug Sets: OPEN HOLE 4500-09' - CIBP @ 4428'

Elevation: 2263' (G.L. / K.B.) T.D.: 4509' PBDT: 4428' Anhydrite Depth: 1450'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): AS PER KCC - RICHARD LACEY - SPOT 2 SXS CEMENT ON CIBP @ 4428' - RUN CEMENT BOND LOG FROM 1500' - TO SURFACE - (IF NO CEMENT) - PERFORATE 2 HOLES @ 600' - CIRCULATE TO SURFACE W/ 200 SXS 60-40 POZ W/ 6% GEL - CUT CSG OFF - 4' BELOW GROUND LEVEL - WELD & DATE CAP ON CSG W/ PLUGGING DATE

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? DRILLED 9/29/62 Horizontal Well Surface SW SE SW 25 - 22-23 SW
9/29/97 Bottom NE NW 36-22-23

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: STAN MITCHELL

HARTMAN OIL CO., INC. Phone: (620) 277 - 2511

Address: 4550 W 9 MI RD - GARDEN CITY City / State: KS. 67846

Plugging Contractor: ALLIED CEMENT - PLAINS INC. KCC License #: 4072
(Company Name) (Contractor's)

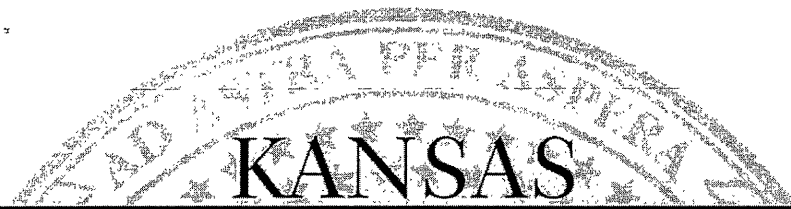
Address: _____ Phone: () - _____

Proposed Date and Hour of Plugging (if known?): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 01/09/04 Authorized Operator / Agent: S. Mitchell
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Hartman Oil Co., Inc.
12950 E. 13th
Wichita, KS 67230

January 15, 2004

Re: BILLINGS #1
API 15-083-21447-01-00
NENW 36-22S-23W, 660 FNL 1980 FWL
HODGEMAN COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely

David P. Williams
Production Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888