

RECEIVED

JAN 14 2004

KCC WICHITA

15-083-10350-00-01

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

WELL PLUGGING APPLICATION

Please TYPE Form and File ONE Copy

Form CP-1
September 2003

This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15-083-10,089-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date 4/63

Well Operator: HARTMAN OIL CO., INC. KCC License #: 30535
(Owner/Company Name) (Operator's)

Address: 12950 E. 13th ST. City: WICHITA

State: KANSAS Zip Code: 67230 Contact Phone: (316) 636-2090

Lease: BILLINGS Well #: 2 Sec. 36 Twp. 22 S. R. 23 East West

75' S - C - NW - NW Spot Location / QQQQ County: HODGEMAN

585' Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

660' Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: N/A Set at: N/A Cemented with: N/A Sacks

Surface Casing Size: 8-5/8" Set at: 246' Cemented with: 200 Sacks

Production Casing Size: 5-1/2" Set at: 4495' Cemented with: 100 Sacks

List (ALL) Perforations and Bridgeplug Sets: 4495-4500' OPEN HOLE - (CIBP @ 4482') - PERFS @ 4386-92'

Elevation: 2260' (G.L. / K.B.) T.D.: 4500' PBTD: 4482' Anhydrite Depth: 1450'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): AS PER KCC - SPOT 2 SXS CEMENT ON CIBP @ 4350'
RUN CEMENT BOND LOG FROM 1500' TO SURFACE - (IF NO CEMENT) - PERFORATE 2 HOLES @ 600' - CIRCULATE
TO SURFACE W/ 200 SXS 60-40 W/ 6% GEL - CUT CSG OFF - 4' BELOW GROUND LEVEL - WELD & DATE CAP ON CSG W/ PLUGGING DATE

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? DRILLED 4/ 63

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: STAN MITCHELL

HARTMAN OIL CO., INC. Phone: (620) 277 - 2511

Address: 4550 W 9 MI ROAD - GARDEN CITY City / State: KS. - 67846

Plugging Contractor: ALLIED CEMENT--PLAINS INC. KCC License #: 4072
(Company Name) (Contractor's)

Address: _____ Phone: () -


Proposed Date and Hour of Plugging (if known?): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 02/12/04 Authorized Operator / Agent: S.T. Mitchell
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

10/04

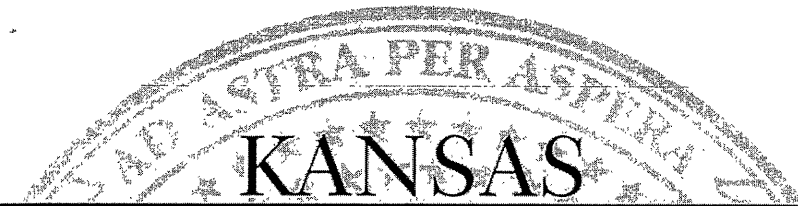

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair John Wine, Commissioner Robert E. Krehbiel, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Hartman Oil Co., Inc.
12950 E. 13th
Wichita, KS 67230

January 15, 2004

Re: BILLINGS #2

~~APT 15-083-10089-00-00~~ 15-083-10350-00-01

NWNW 36-22S-23W, 585 FNL 660 FWL
HODGEMAN COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely

David P. Williams
Production Supervisor