

15-153-20003-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Rawlins County. Sec. 22 Twp. 1S Rge. 32W (E) (W)

Location as "NE/CNW/SW" or footage from lines C NE NE

Lease Owner Okmar Oil Company

Lease Name Walsh Well No. 1

Office Address 1130 Wichita Plaza Bldg., Wichita, Ks. 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 1-27-67 19

Application for plugging filed 1-27-67 19

Application for plugging approved 1-27-67 19


Plugging commenced 1-27-67 19

Plugging completed 1-27-67 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

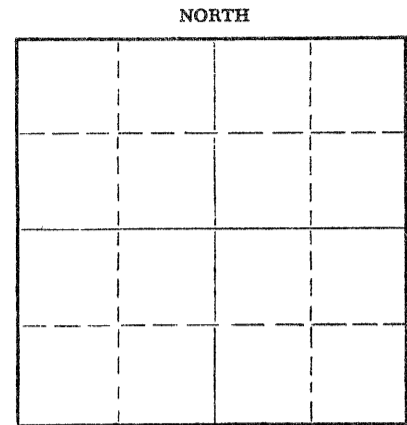

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4160 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	303'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set Plug @ 660' with 20 sacks cement
Set Plug @ 300' with 20 sacks cement
Set Plug @ 40' w/10 sks. cem. & 1/2 sk. hulls

RECEIVED
STATE CORPORATION COMMISSION

JAN 31 1967
1-31-1967

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.
Address Box 486, Great Bend, Kansas 67530

STATE OF ~~KANSAS~~ KANSAS, COUNTY OF BARTON, ss.

Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

Box 486, Great Bend, Kansas 67530 (Address)

SUBSCRIBED AND SWORN TO before me this 30th day of January, 1967

My commission expires April 1, 1967

Notary Public.

15-153-20003-00-00

DRILLER'S LOG

COMPANY: Okmar Oil Company
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: WALSH #1
 LOCATION: C NE NE SEC. 22-1S-32W
 RAWLINS COUNTY, KANSAS
 COMMENCED: 1-21-67
 COMPLETED: 1-27-67

0	195	Shale, Sand
195	220	Sand
220	775	Shale
775	1790	Shale, Sand Streaks
1790	2748	Shale, Shells
2748	2786	Anhydrite
2786	2820	Shale
2820	3585	Shale, Lime
3585	3925	Lime, Shale
3925	4160	Lime
	<u>4160</u>	<u>RTD - D. & A.</u>

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 31 1967
 1-31-1967
 CONSERVATION DIVISION
 Wichita, Kansas

8 5/8" 8 rd. 24# used surface casing set @ 303' with 200 sacks of Common, 2% cc

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Walsh #1 Well, located C NE NE of Section 22, Township 1 South, Range 32 West, Rawlins County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
 LESLIE KITE

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 30th day of January, 1967.

Ulanda Nichols
 ULANDA NICHOLS

My Commission Expires:
 April 1, 1967