


15-153-19004-00-00 FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rawlins County. Sec. 21 Twp. 1S Rge. 32 X8/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
W/2 NW/4, 660' FNL & 660' FWL
Lease Owner Getty Oil Company
Lease Name Wilhelm Unit Well No. 4
Office Address 2705 Vine, Unit #4, Hays, Kansas 67601
Character of Well (Completed as Oil, Gas or Dry Hole) Oil

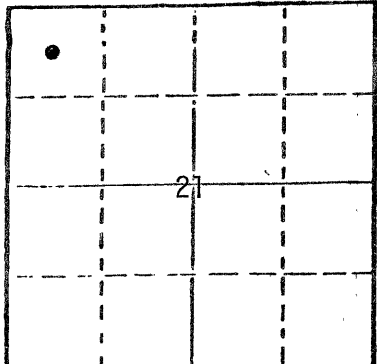

Locate well correctly on above Section Plot

Date Well completed May 9, 1960
Application for plugging filed February 16, 1983
Application for plugging approved March 22, 1983
Plugging commenced May 31, 1983
Plugging completed May 31, 1983
Reason for abandonment of well or producing formation Unec-
onomical to operate due to poor csg. condition & poor potential
If a producing well is abandoned, date of last production
March 20, 1963

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Carl Goodrow
Producing formation Lansing-KC Depth to top 4018' Bottom 4170' Total Depth of Well 14202' PBD
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing-Kansas City	Oil	4018'	4170'	8-5/8"	360'	None
				2-7/8"	4238'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Pumped 120 sx. 50/50 Pozmix down 2-7/8" tbq. Pumped 80 sx. 50/50 Pozmix down annulus
@ 300 psi. Pumped plug and 50 sx. 50/50 Pozmix down tbq. @ 150 psi. Dug down 5' and
cut off csg. and tbq. Capped well and backfilled. Job complete 5-31-83.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Halliburton

STATE OF Kansas COUNTY OF Ellis, ss.
Frank Renard (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Frank Renard
2705 Vine, Unit #4, Hays, Kansas 67601
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of June, 1983



Bobbie Schippers
Notary Public.

My commission expires

RECEIVED
STATE CORPORATION COMMISSION

JUN 08 1983
6-8-1983
CONSERVATION DIVISION
Wichita, Kansas