

RECEIVED
FEB 17 2004
KCC WICHITA

WELL LOG

Date started 2-11-61
Date completed 2-19-61

Eveleigh B2
Section 5, Twp. 18, Range 12W
Barton County, Kansas

Set 8 5/8" surface pipe at 250' and
cemented with 160 sacks incore cement.
Ran 108 joints of 5 1/2" OD J55 SS14"
Casing and set at 3,345' with 100 sacks
of regular cement.

Elevation	1810'	KB
Heebner	2983'	(-1173)
Lansing	3098'	(-1288)
Kansas City	3328'	(-1518)
Arbuckle	3344'	(-1584)
Total Depth	3348'	

- 0' - 325' Shale and shells
- 325' - 785' Shale shells and redbed
- 785' - 1615' Shale and shells
- 1615' - 2850' Lime and shale
- 2850' - 2900' Lime
- 2900' - 3130' Lime and shale
- 3130' - 3175' Lime
- 3175' - 3270' Lime and shale
- 3270' - 3344' Lime and Conglomerate
- 3344' - 3348' Arbuckle

AFFIDAVIT

State of Kansas County of Barton

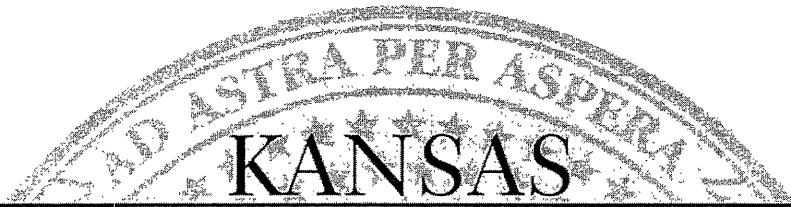
I, A. M. Jones, certify that the above is a true and correct log as reflected
by the Daily drilling reports of the Jones Drilling Company.

By: A. M. Jones
A. M. Jones

Subscribed and sworn before me this 27th day of February, 1961.

John W. Poos
John W. Poos, Notary Public

My commission expires April 11, 1963.

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Nadel and Gussman, LLC
3200 First Place Tower
Tulsa, OK 74103-4313

February 19, 2004

Re: EVELEIGH B #2
API 15-009-15453-00-00
S2SESW 5-18S-12W, 330 FSL 1980 FWL
BARTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely

David P. Williams
Production Supervisor

District: #4
2301 E. 13th
Hays, KS 67601
(785) 625-0550