

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

15-153-20118-00-00
WELL PLUGGING RECORD

Rawlins County, Sec. 30 Twp. 1S Rge. (E) 32 (W)

Location as "NE/CNW%SW%" or footage from lines NW NW

Lease Owner Adair Oil Company

Lease Name Simminger Well No. 1

Office Address Box 7011, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 6-2 19 71

Application for plugging filed 6-2 19 71

Application for plugging approved 6-2 19 71


Plugging commenced 6-2 19 71

Plugging completed 6-3 19 71

Reason for abandonment of well or producing formation No oil or gas found in commercial quantities.

If a producing well is abandoned, date of last production --- 19 --

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

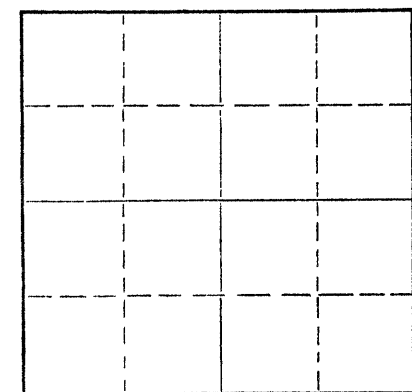

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Bill Nickols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4275 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	322'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set first plug at 2125 feet with 100 sacks;

second plug at 330 feet with 30 sacks; top

plug at 40 feet with 10 sacks. Plugging

completed at 6:00 a.m. 6-3-71.

RECEIVED
STATE CORPORATION COMMISSION
06-10-1971
JUN 10 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Co., Inc.

Address 435 Page Court, 220 W. Douglas, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Wilson Rains

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains Wilson Rains

435 Page Court, 220 W. Douglas, Wichita, Kansas (Address)

Subscribed and sworn to before me this 7 day of June, 19 71



Jeanine Durand
Notary Public.

69

ROTARY DRILLING LOG
15-153-2018-00-00

Operator: Adair Oil Company
#1 SIMMINGER
NW NW Section 30-1S-32W
Rawlins County, Kansas

Contractor: Rains & Williamson
Oil Co., Inc.
Commenced: 5-27-71
Completed: 6-3-71
Casing: 8-5/8"/322'/275 sacks

Formations

Surface Clay and Sand	45'
Shale and Sand	280'
Shale	326'
Shale and Shells	1820'
Shale	2541'
Lime and Sand	2609'
Shale and Lime	2640'
Shale	2870'
Anhydrite	2910'
Shale	3280'
Shale and Lime	3690'
Lime	3755'
Lime and Shale	4080'
Lime	4230'
Lime and Shale	4275'
Rotary Total Depth	4275'

RECEIVED
STATE CORPORATION COMMISSION
JUN 10 1971
CONSERVATION DIVISION
Wichita, Kansas

We certify the above log is true and correct, to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO., INC.

Wilson Rains
Wilson Rains

Subscribed and sworn to me, a Notary Public, within and for the State of Kansas, County of Sedgwick, this 7 day of June, 1971.

Jeanine Durand
Jeanine Durand Notary Public

My Commission Expires: 3-31-74

