

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-01026-00-00
Spot: SESW Sec/Twnshp/Rge: 31-29S-8W
660 feet from S Section Line, 3300 feet from E Section Line
Lease Name: DEE Well #: 1
County: KINGMAN Total Vertical Depth: 4266 feet

Operator License No.: 5003
Op Name: MCCOY PETROLEUM CORPORATION
Address: 8080 E. CENTRAL, SUITE 300
WICHITA, KS 67206

PROD Size: 5.5 feet: 4266 50 SX CMT
SURF Size: 8.625 feet: 323 275 SX CMT

8156 81

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 04/29/2004 2:30 PM

Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 532-3292

Proposed Plugging Method: Perf 4182'-4186' & 4201'-4227'
Sand 4119' & 5 sxs
1375' & 35 sxs
925' & 35 sxs
circ 375'
Rec 3032'

RECEIVED
KCC DISTRICT #2
MAY 11 2004
WICHITA, KS

Plugging Proposal Received By: STEVE VANGIESON

Witness Type: NONE

Date/Time Plugging Completed: 04/29/2004 2:30 PM

KCC Agent: STEVE VANGIESON

Actual Plugging Report:

The perforations were sanded back to 4119' and capped with 5 sacks of cement. The casing was recovered from 3032' and pulled to 1375'. Spotted 35 sacks of cement and pulled to 925'. Spotted 35 sacks of cement and pulled casing to 375'. Circulated cement to surface.

60/40 posmix with 4% gel.

Perfs:


Top	Bot	Thru	Comments
4201	4227		
4182	4186		

Remarks: ALLIED CEMENT #15169 PBTD 4214'

Plugged through: CSG

District: 02

Signed _____

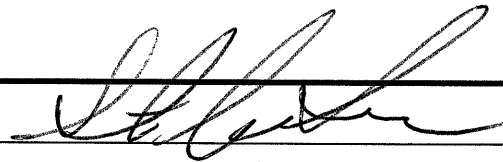

(TECHNICIAN)

INVOICED

DATE 5-12-04

INV. NO. 2004061556