

15-153-20081-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Rawlins County. Sec. 2 Twp. 1 Rge. 34 (E) (W)

Location as "NE/CNW%SW%" or footage from lines C SE NW

Lease Owner Chief Drilling Company, Inc.

Lease Name Ohlson Well No. 1

Office Address Suite 905 Century Plaza Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed 10-22-70 19__

Application for plugging approved 10-23-70 19__


Plugging commenced 11-17-70 19__

Plugging completed 11-23-70 19__

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

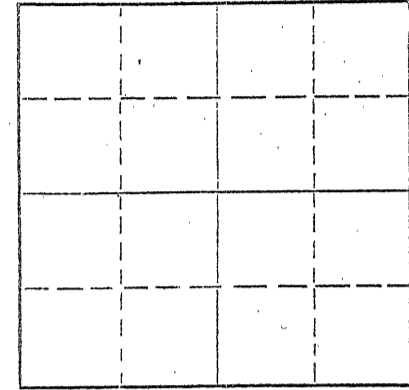

Name of Conservation Agent who supervised plugging of this well Bill Nichols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4300 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	220	None
				4 1/2	4299	1906'.30

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed plug to 3150'. Dumped 20 gallons of sand and 1/2 sacks of cement. Loaded hole. Shot casing at 2700', 2418' and 1914'. Laid down 56 joints of casing. Allied squeezed well with 3 sacks of hulls, 40 sacks of gel and 135 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
DEC 7 - 1970
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc. 12-7-70
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 30 day of November, 19 70



My commission expires May 27, 1973 James W. Rockhold Notary Public.

WELL LOG

15-153-20081-00-00

Chief Drilling Co., Inc.
Suite 905 Century Plaza
Wichita, Kansas 67202

#1 Ohlson
SE NW Sec. 2-1-34W
Rawlins Co., Kansas

Contractor: Company Tools
Casing Record: 220' of 8 5/8" w/150 sacks common quickset.
4299' of 4 1/2" w/150 sacks cement.

Commenced: 7/17/70
Completed: 7/28/70

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Surface clay and sand	0	45	3094 Gr.
Shale & shells	221	1520	3096 D.F.
Shale & sand streaks	1520	1980	3099 K.B.
Shale & shells	1980	2400	
Lime streaks & shale	2400	2757	
False Anhydrite	2757	2771	
Shale & shells	2771	2951	
Anhydrite	2951	2992	
Shale, & shells	2992	3325	
Shale & lime	3325	4300	
Total Depth	4300		

<u>FORMATION TOPS</u>	
Anhy.	2957 + 142
Neva	3486 - 387
Waubunsee	3604 - 505
Howard	3760 - 661
Topeka	3819 - 720
Lansing	4019 - 920
RTD	4300 -1201

RECEIVED
STATE CORPORATION COMMISSION
OCT 26 1970
CONSERVATION DIVISION
Wichita, Kansas
10-26-70

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the SE NW Sec. 2-1-34W, Rawlins County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

Jim Robinson
Jim Robinson, Office Manager

Subscribed, and sworn to before me this 30th day of July, 1970.

Karen E. Duarte
Karen E. Duarte, Notary Public

