

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Wichita State Office Building  
130 South Market, Room 2078  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-177

15-137-18172-00-00

API NUMBER drilled 8-21-59

LEASE NAME Wiltrout

WELL NUMBER 8

1650 Ft. from S Section Line

660 Ft. from E Section Line

SEC. 27 TWP. 5S RGE. 21W (E) or (W)

COUNTY Norton

Date Well Completed 8-21-59

Plugging Commenced 9-18-03

Plugging Completed 9-18-03

RECEIVED

MAY 04 2004

KCC WICHITA

LEASE OPERATOR R.P. Nixon Operations, Inc.

ADDRESS 207 West 12th Street Hays, KS 67601

PHONE #(785) 628-3834 OPERATORS LICENSE NO. 5252

Character of Well oil

(Oil, Gas, D&A, SWD. Input, Water Supply Well)

The plugging proposal was approved on 9-17-03 (date)

by KCC District 4 - Herb Deines (KCC District Agent's Name).

Is ACO-1 Filed? No If not, is well log attached? yes

Producing Formation Arb/Rg Sd Depth to Top 3653' Bottom 3671' T.D. 3671'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS, OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Surf</u>				<u>8 5/8"</u>	<u>192'</u>	<u>None</u>
<u>Prod</u>				<u>4 1/2"</u>	<u>3656' 3671'</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from        feet to        feet each set.

Ran in hole with tubing to 3030' and pumped 75 sacks of 60/40 Pozmix, 10% gel. Pulled to 2000' and circulated cement to surface w/60 sacks of same cement w/400# hulls. Came out of hole w/tubing and tied on to 4 1/2" casing. Pumped 10 sacks at 900# max. Shut-in 700#. Tied on to 4 1/2" casing annulus and pumped 105 sacks same cement w/100# hulls. Max. pressure 300# and shut-in pressure 100#.

(If additional description is necessary, use BACK of this form.)


Name of Plugging Contractor Murfin Drilling License No. 30606

Address 250 N. Water Ste. 300 Wichita, KS 67202

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: R.P. Nixon Operations, Inc.

STATE OF Kansas COUNTY OF Ellis, ss.

Dan A. Nixon (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.



(Signature) [Signature]

(Address) 207 West 12th St. Hays, KS 67601

SUBSCRIBED AND SWORN TO before me this 20th day of April, 19 2004

[Signature]  
Notary Public

My Commission Expires: 3.12.05

JOCELYN-VARN

#8 WILTROUT

27-5-21W  
SL NE SE

Contr. IRUSCO DRLG

NORTON County

E 22 1/2 RB Comm.

Comp. 8-21-59 IP

250 BOPD


Tops	Depth	Datum
HEEB	3379	-1137
TOR	3407	-1165
LANS	3422	-1180
ARB	3653	-1411
REAG	3668	-1426
TD	3671	-1429

Casing

8" 192  
4" 3671

DST 3656-3671/1 HR, 2076' FR 0,  
NW, BHP 805#  
PERF 4/3647-48: PLUG 3615: SWB  
71 BO/4 HR

RAY WEST POOL



INDEPENDENT OIL & GAS SERVICE  
WICHITA, KANSAS

RECEIVED  
MAY 04 2004  
KCC WICHITA


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company- JOCELYN-VARN OIL CO.  
Farm- Wiltrot No. 8

SEC. 27 T. 5 R. 21W  
C SL NE SE

Total Depth. 3671'  
Comm. 8-10-59 Comp. 8-21-59  
Shot or Treated.  
Contractor. Trusco Drlg.  
Issued. 10-31-59

County Norton  
KANSAS



CASING:

8" 192'  
4" 3671' - 3656'

Elevation. 2242' RB

Production. 250 BOPD

Figures Indicate Bottom of Formations.

surface	196
sand & shale	1150
shale	1826
Anhydrite	1848
shale	2100
lime & shale	3255
lime	3315
lime & shale	3345
lime	3533
lime & chert	3575
lime	3671
Total Depth	

TOPS: SCOUT	
Heebner	3379
Toronto	3407
Lansing	3422
Arbuckle	3653
Reagan	3668

RECEIVED  
MAY 04 2004  
KCC WICHITA

# ALLIED CEMENTING CO., INC.

15730

Federal Tax I.D.# ~~48-0727500~~

REMIT TO P.O. BOX 31  
RUSSELL, KANSAS 67665

SERVICE POINT:  
Russell

DATE <u>9-18-03</u>	SEC. <u>27</u>	TWP. <u>5</u>	RANGE <u>21</u>	CALLED OUT <u>8:00 AM</u>	ON LOCATION <u>10:00 AM</u>	JOB START <u>10:00 AM</u>	JOB FINISH <u>2:30 PM</u>
LEASE <u>WILTROUT</u>		WELL # <u>8</u>	LOCATION <u>LOGAN 60S SW 1/4 N 1/4 W</u>	COUNTY <u>NORTON</u>	STATE <u>KANSAS</u>		
<input checked="" type="radio"/> OLD OR NEW (Circle one)							

CONTRACTOR MURFIN DRUG

TYPE OF JOB plug ABANDONED well

HOLE SIZE \_\_\_\_\_ T.D. 3671

CASING SIZE 4 1/2 DEPTH 3030

TUBING SIZE 2 DEPTH 3030

DRILL PIPE \_\_\_\_\_ DEPTH \_\_\_\_\_

TOOL \_\_\_\_\_ DEPTH \_\_\_\_\_

PRES. MAX 900 MINIMUM 700

MEAS. LINE \_\_\_\_\_ SHOE JOINT \_\_\_\_\_

CEMENT LEFT IN CSG. \_\_\_\_\_

PERFS. \_\_\_\_\_

DISPLACEMENT \_\_\_\_\_

OWNER Same

CEMENT AMOUNT ORDERED 250 SK 60/40 10% Gel  
500 # HULLS

**EQUIPMENT**

PUMP TRUCK CEMENTER GLENN

# 345 HELPER Dave

BULK TRUCK DRIVER Scott - Gary

# 222

BULK TRUCK DRIVER \_\_\_\_\_

# \_\_\_\_\_

COMMON	<u>150</u>	@	<u>7.15</u>	<u>1072.50</u>
POZMIX	<u>100</u>	@	<u>3.20</u>	<u>320.00</u>
GEL	<u>18</u>	@	<u>10.00</u>	<u>180.00</u>
CHLORIDE		@		
<u>Hulls</u>	<u>5</u>	@	<u>18.00</u>	<u>90.00</u>
		@		
		@		
		@		
		@		
HANDLING	<u>200</u>	@	<u>1.45</u>	<u>287.50</u>
MILEAGE	<u>54.1</u>	@	<u>17.30</u>	<u>937.50</u>
TOTAL				<u>2947.50</u>

**REMARKS:**

2" Tubing @ 3030' Spot 75 SK Cement  
Pulled to 2000' & CIRCULATED  
Cement to Surface w/ 60 SR  
+ 400# Hulls. Came out w/ tubing.  
4 1/2 SWAGE - mixed 10 SR cement  
@ 900 # MAX PSI, SHUT IN @ 700 #  
2 5/8 Backside mixed 105 SK w/  
100 # Hulls @ 300 MAX SHUT IN  
@ 100 #.

**SERVICE**

DEPTH OF JOB	_____		
PUMP TRUCK CHARGE	_____		<u>175.00</u>
EXTRA FOOTAGE	_____	@	
MILEAGE	<u>75</u>	@	<u>3.50</u> <u>262.50</u>
PLUG	_____	@	
	_____	@	
	_____	@	
TOTAL <u>737.50</u>			

CHARGE TO: R.P. Nixon Oil Oper.

STREET \_\_\_\_\_


CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

**FLOAT EQUIPMENT**

_____	@	_____
_____	@	_____
_____	@	_____
_____	@	_____
_____	@	_____

To Allied Cementing Co., Inc.  
You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read & understand the "TERMS AND CONDITIONS" listed on the reverse side.

SIGNATURE \_\_\_\_\_

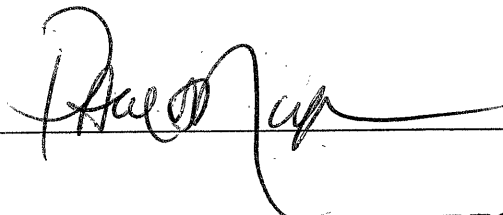

PRINTED NAME \_\_\_\_\_

RECEIVED  
MAY 04 2004  
KCC WICHITA