


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. BOX 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

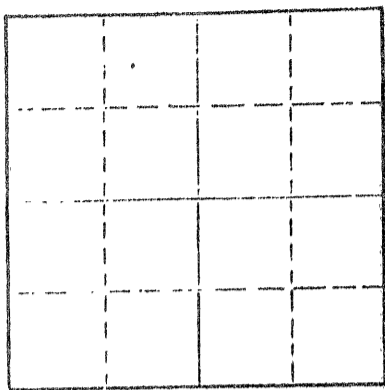

Locate well correctly on above Section Plat

Rawlins County, Sec 12 Twp. 1 Rge. 34 (E) (W)  
Location as "NE/CNW/SE" or footage from lines SE SE  
Lease Owner Chief Drilling Company  
Lease Name Horinek #1 Well No.  
Office Address Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19\_\_  
Application for plugging filed 19\_\_  
Application for plugging approved 19\_\_  
Plugging commenced 11/6/74 19\_\_  
Plugging completed 11/22/74 19\_\_  
Reason for abandonment of well or producing formation depleted.  
If a producing well is abandoned, date of last production 19\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Nichols  
Producing formation Depth to top Bottom Total Depth of Well 4275 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	245	none
				4 1/2"	4274	1697'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed plug to 4000', ran sand to 3975' and dumped 3 sacks cement.  
Shot pipe at 2310', 2000', 1705' and pulled 64 joints of 4 1/2" casing.  
Squeezed well with 5 sacks hulls, 50 sacks gel and 150 cu. ft. cement.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 10 1974  
CONSERVATION DIVISION  
Wichita, Kansas

12-10-74

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KELSO CASING PULLING  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
CHASE, KANSAS  
(Address)

Subscribed and Sworn to before me this 5th day of December, 1974

MARGARET MELCHER  
NOTARY PUBLIC  
Rice County, Kansas  
My Commission Expires  
Feb. 15, 1975

[Signature]  
Notary Public.

DRILLERS LOG

HORINEK #1

15-153-20157-00-00

CASING RECORD:	OPERATOR:	Chief Drilling Co.	DESCRIPTION:
245' 8-5/8"	CONTRACTOR:	John O. Farmer, Inc.	SE SE
Cemented w/175 sx	COMMENCED:	May 20, 1973	Sec. 12-1S-34W
TOTAL DEPTH:	COMPLETED:	May 31, 1973	Rawlins Co., Kansas
4275'			

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Sand	0	245	
Shale	245	1105	
Shale & Sand	1105	1905	
Shale & Shells	1905	2150	
Shale & Sand	2150	2890	
Shale & Shells	2890	2927	
Anhydrite	2927	2962	
Shale & Shells	2962	3090	
Shale & Lime	3090	3200	
Shale & Shells	3200	3400	
Lime & Shale	3400	3931	
Lime	3931	3970	
Lime & Shale	3970	4070	
Lime	4070	4105	
Lime & Shale	4105	4275	4 1/2" set @ 4274' w/200 sx. cement


RECEIVED  
STATE CORPORATION COMMISSION  
MAY 24 1974  
524-74  
CONSERVATION DIVISION  
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

JOHN O. FARMER, INC.

By John O. Farmer  
John O. Farmer

Subscribed and sworn to before me this 5th day of June, 1973.



My commission expires:  
February 15, 1975

Helen Carlson  
Helen Carlson