


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Phillips County, Sec. 25 Twp. 2S Rge. 19 E/W  
Location as "NE/CNW/SW" or footage from lines  
NW NW SE

Lease Owner Petroleum Management Inc.  
Lease Name Friebus Well No. #1  
Office Address 400 N Woodlawn, Suite 201 Wichita, Ks. 67208  
Character of Well (Completed as Oil, Gas or Dry Hole)

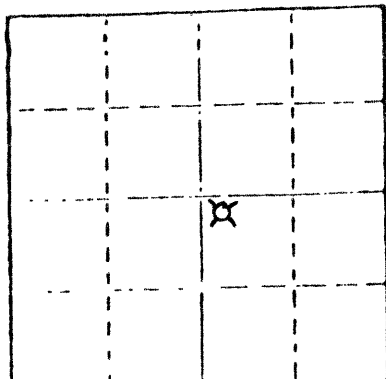

Dry Hole  
Date Well completed January 13, 1980  
Application for plugging filed January 13, 1980  
Application for plugging approved January 13, 1980  
Plugging commenced January 13, 3:00 P.M. 1980  
Plugging completed January 13, 4:30 P.M. 1980  
Reason for abandonment of well or producing formation  
No Commercial Production

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Marvin Schmidt  
Producing formation Depth to top Bottom Total Depth of Well  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

LOCATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface casing	common	0	206.10	8 5/8"	206.10'	0

Describe in detail the manner in which the well was plugged, indicating where the mud plug was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug #1 @ 960' with 70 sxs  
Plug #2 @ 180' with 20 sxs  
Plug #3 @ 40' with 1 sx Halls  
a wooden plug & 10 sxs Rathole with 5 sxs  
Total 105 sxs 50-50 poz 6% gel

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pioneer Drilling Company, Inc. 2-19-80  
308 West Mill Plainville, Kansas 67663

X STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
Dale Silcott (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Silcott  
400 N. Woodlawn, Suite 201, Wichita, Ks.  
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of February, 1980.

My commission expires 3/1/81

Bonnie Brown Notary Public.



W E L L L O G

OPERATOR: Petroleum Management, Inc.

WELL NAME: Friebus #1 LOCATION: NW NW SE 25-2S-19W

COUNTY: Phillips STATE: Kansas

WELL COMMENCED: January 7, 1980 WELL COMPLETED: January 13, 1980

ELEVATION: 2154' K.B. TOTAL DEPTH: 3760'

PRODUCTION: D & A RIG NO: #1

CASING - 8-5/8": 206.10' of 28# cemented with 120 sxs common 2% gel 3% cc  
5-1/2": none

ALL MEASUREMENTS TAKEN FROM THE TOP OF ROTARY BUSHING:

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0'	215'	sand and clay		
215'	700'	sand and clay		
700'	1700'	shales and sands		
1701'	1705'	Anhydrite		
1705'	1728'	Anhydrite		
1728'	1985'	sand and shale		
1985'	2300'	shale and lime	1991' - 1/4 degree	
2300'	2354'	shales and shells		
2354'	2545'	shale and shells		
2545'	2584'	shale	2584' - 2 degrees	
2584'	2597'	shale and lime		
2597'	2785'	shales and limes		
2785'	3000'	shale and lime		
3000'	3040'	lime and shale		
3040'	3148'	lime and shale		
3148'	3343'	limes and shales		
3343'	3460'	lime and shale	3460' - 2 degrees	
3460'	3460'			
3460'	3475'	lime and shale		
3475'	3612'	lime and shale		
3612'	3696'	lime and shale		
3696'	3760'	lime and shale		
3760'	RTD			

RECEIVED  
STATE COMMISSION  
FEB 19 1980  
CONSERVATION DIVISION  
Topeka, Kansas  
2-19-80

STATE OF KANSAS  
COUNTY OF

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct

PIONEER DRILLING CO., INC.

By Roger L. Conner

SUBSCRIBED AND SWORN TO, BEFORE ME, This 5th day of Feb., 1980.

Connie Jo Austin  
- NOTARY PUBLIC

