

15-147-00062-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR


FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Phillips County, Sec. 35 Twp. 25 Rge. 19W S(E) S(W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines.
Lease Owner Forbes & Miller
Lease Name Flossie Dusin Well No. 3
Office Address
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole.
Date well completed Sept. 11, 1942. 19
Application for plugging filed 1/2/46 19
Application for plugging approved 1/18/46 19
Plugging commenced 1/6/46 19
Plugging completed 1/9/46 19
Reason for abandonment of well or producing formation Dry

NORTH



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes.

Name of Conservation Agent who supervised plugging of this well Herb. Kerr.
Producing formation Depth to top Bottom Total Depth of Well 3360' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 1/4"	253'	None
				5 1/2"	3357'	2548'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

T.D. 3360'. 5 sacks cement dumped at 3360'. Top of cement 3322'.
Heavy mud through 5 1/2" pipe from 3322' to 250'. Set 8' rock bridge at 250'; dumped 15 sack cement. Top of cement at 183'.
Heavy mud from 183' to 10'. Dumped 10 sack cement for cap.

35 2 19W
40 27

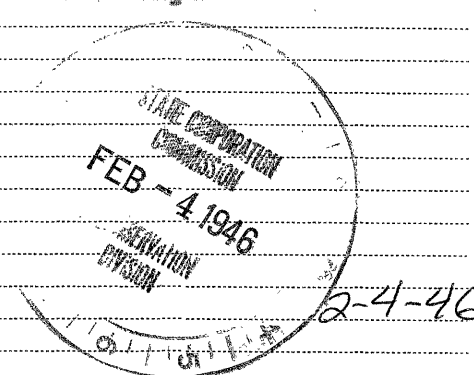

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Forbes & Miller Casing Pulling Co.
Address P.O. Box 711, Great Bend, Kansas.

STATE OF Kansas, COUNTY OF Barton, ss.
Earl Miller (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Forbes & Miller Casing Pulling Co.
By: Earl Miller
Box 711 Great Bend Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 2nd day of February, 19 46

H. C. Colegrove Notary Public.

My commission expires Oct. 28, 1948

15-147-00062-00-00

THE CARTER OIL COMPANY

Flossie Dushin #3 Center SW SE Section 35-2-19W Phillips County, Kansas
Drilling Commenced 7-12-42 Drilling Completed 9-11-42
Dry Hole - Not Plugged

0	-	130	soil & sand
130	-	295	shale
295	-	445	sand & shale
445	-	630	shale
630	-	740	broken shale
740	-	945	sand & shale
945	-	1130	shale & shells
1130	-	1270	sandy shale
1270	-	1558	shale
1558	-	1587	anhydrite
1587	-	2185	shale
2185	-	2230	lime & shale
2230	-	2261	lime
2261	-	2460	shale
2460	-	2503	lime
2503	-	2615	shale & shells
2615	-	2630	broken lime
2630	-	2694	shale
2694	-	2814	lime & shale
2814	-	2926	shale & shells
2926	-	2940	sandy shale
2940	-	3002	broken lime
3002	-	3026	lime
3026	-	3060	sandy lime
3060	-	3094	lime
3094	-	3230	broken lime
3230	-	3266	lime & chert
3266	-	3360	broken lime
3360	-		Total Depth

8 5/8" 32# smls osg set @303' w/115s
5 1/2" 14# Smls osg set @3357' w/150 sx
11" hole from 0 to 310'
7 7/8" " " 310' to 3360'

Elevation 2073 - Drk floor
Top Topeka 2942'
Top Kansas City 3167'

PLUGGING
FILE SEC 35-2-19W
BOOK PAGE 40 LINE 27

STATE OF KANSAS
MAY 30 1943

3-30-48