

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-155-21217-00-00
Spot: NWNW Sec/Twnshp/Rge: 4-26S-8W
660 feet from N Section Line, 810 feet from W Section Line
Lease Name: THIEL Well #: 1
County: RENO Total Vertical Depth: 4472 feet

Operator License No.: 5316
Op Name: FALCON EXPLORATION, INC.
Address: 155 N. MARKET, STE. 1020
WICHITA, KS 67202

PROD Size: 5.5 feet: 4280 200 SX CMT
SURF Size: 8.625 feet: 332 225 SX CMT

145 34

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 05/18/2004 12:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (316) 727-3410

Proposed Plugging Method: Perfs 3825'-3831'; sand to 3750- & 5 sxs; 1350' & 35 sxs; 700' & 35 sxs; 370' - 0'.
Rec 2985'.

RECEIVED
KCC DISTRICT #2
JUN - 7 2004
WICHITA, KS

Plugging Proposal Received By: STEVE VANGIESON Witness Type: NONE
Date/Time Plugging Completed: 05/18/2004 12:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

The perforations were sanded back to 3750' and capped with 5 sacks of cement. Recovered casing from 2985', pulled to 1350', and spotted 35 sacks of cement. Pulled casing to 700' and spotted 35 sacks of cement. Pulled casing to 370' and circulated cement to surface.

60/40 posmix with 4% gel.

Perfs:


Top	Bot	Thru	Comments
3825	3831		

Remarks: ALLIED CEMENT

Plugged through: CSG

District: 02

Signed _____

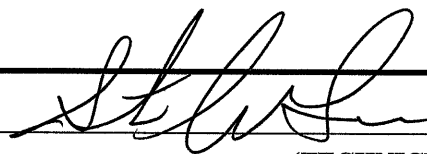

(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION

JUN 23 2004

CONSERVATION DIVISION
WICHITA, KS

INVOICED

DATE

6-23-04

INV. NO.

2004061774