

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-21002-00-01
Spot: SE Sec/Twnshp/Rge: 1-32S-42W
1328 feet from S Section Line, 1312 feet from E Section Line
Lease Name: RUSSELL Well #: 2-1RE
County: MORTON Total Vertical Depth: 5357 feet

Operator License No.: 32782
Op Name: DUKE ENERGY FIELD SERVICES, LP
Address: 370 17TH ST., STE. 2500
DENVER, CO 80202

CIBP Size: feet: 4907 WITH 30 SX CMT
MSCC Size: feet: 3300
PROD Size: 5.5 feet: 5357 WITH 71 SX CMT
SURF Size: 8.625 feet: 1421 WITH 441 SX CMT

174¹⁰

Well Type: GW UIC Docket No: _____ Date/Time to Plug: 06/09/2004 1:00 PM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE
Proposal Rcvd. from: RUSSELL BENTLEY Company: DUKE ENERGY FIELD SERVICES Phone: (303) 595-3331

Proposed Plugging Method: CIBP ABOVE PERFORATIONS WITH 10 SX CMT. 50 SX CMT AT CASING SHOOTOFF POINT. 75 SX CMT AT 1500'. 50 SX CMT AT 600'. 10 SX CMT AT 40'.

Plugging Proposal Received By: STEVE DURRANT
Date/Time Plugging Completed: 06/09/2004 8:00 PM

WitnessType: COMPLETE (100%)
KCC Agent: JIM HOLLAND

Actual Plugging Report:

PBTD 5300'. CIBP @ 4907' WITH 30 SX CMT. 1ST PLUG AT 2200' WITH 50 SX CMT. GOOD CIRCULATION. 2ND PLUG AT 1450' WITH 75 SX CMT. 3RD PLUG AT 600' WITH 50 SX CMT. 4TH PLUG AT 40' WITH 15 SX CMT TO SURFACE.


Perfs:

Top	Bot	Thru	Comments
5030	5045		
RECEIVED KANSAS CORPORATION COMMISSION JUN 21 2004 CONSERVATION DIVISION WICHITA, KS			

Remarks: USED COMMON CEMENT BY EAGLE WELL SERVICE. RECOVERED 2200' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

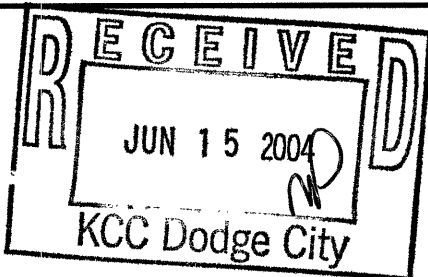

Signed

Jim Holland
(TECHNICIAN)

INVOICED

DATE 6-21-04
TEL NO. 200 4061761

Form CP-23