

THE CORALENA OIL COMPANY

KENNEDY BUILDING

TULSA 3, OKLAHOMA

Dec. 30, 1943

15-147-01002-0000

State Corporation Commission
Conservation Division
Wichita, Kansas

Gentlemen:



Enclosed is a copy of the well log of the
Coralena Oil Company No. 1 Bach, C-NW-NE,
Section 24-2S-19W, Phillips County, Kansas.
The well plugging record was mailed to
you several days ago.

Yours very truly,

THE CORALENA OIL COMPANY

BY Frank Bennett

FB:JD

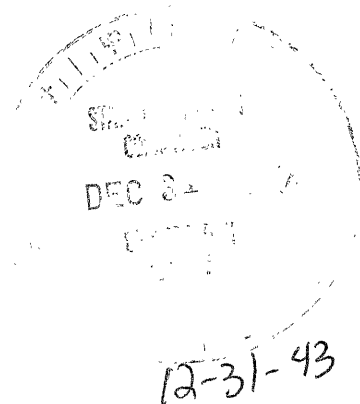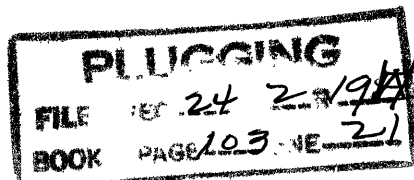

15-147-01002-00-00

THE CORALENA OIL COMPANY
BACH #1
C-NW-NE, Sec. 24-28-19W
PHILLIPS CO., KANSAS

<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
0	38	surface clay
38	123	sand
123	156	shale and shells
156	164	lime shells
164	227	shale and shells
227	380	shale
380	460	shale - sandy
460	530	sticky shale
530	905	shale and shells
905	930	sand
930	1160	shale and shells
1160	1440	sand & shale
1440	1695	red rock, shale and shells
1695	1728	anhydrite
1728	1746	lime and shale
1746	1895	red rock and shale
1895	1980	lime and shale
1980	2000	sticky shale
2000	2180	shale
2180	2215	lime
2215	2250	shale
2250	2270	lime
2270	2360	shale.
2360	2435	lime and shale
2435	2490	shale
2490	2515	lime
2515	2534	lime and shale
2534	2580	shale
2580	2620	shale and shells
2620	2700	lime & shale
2700	2820	shale
2820	2840	lime
2840	2860	lime - broken
2860	2960	shale
2960	2970	lime
2970	3000	lime - broken
3000	3055	lime and shale
3055	3098	Topeka @ 3055
3098	3141	lime and shale
3141	3173	lime
3173	3185	dolomite - soft, sandy.
3185	3215	lime - broken
3215	3220	lime
3220	3231	lime and shale
3231	3250	lime
3250	3255	lime - broken
3255	3281	lime
3281	3284	lime - broken
3284	3287	K. C. @ 3281
3287	3325	lime - grey
3325	3332	lime - stain
3332	3340	lime
3340	3350	lime - cherty
3350	3355	lime - oolitic. Slight saturation & porosity. <u>Water</u>
3355	3375	lime
3375	3377	lime - Poor saturation - no porosity.
3377	3448	lime - hard.
3448	3453	lime - stain.
3453	3521	lime - hard.
3521	3538	lime - slight saturation - black, low gravity.
		lime.
		red & green shale

PLUGGING
 FILE 24-2-1914
 BOOK PAGE 103 IE 21

12-31-43

15-147-01002-06-00

THE CORALENA OIL COMPANY, Bach #1, C NW NE, 24-2-19, Phillips Co.,
Kansas (Cont'd)

<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
3538	3555	lime and shale
3555	3565	shale
3565	3592	shale - sticky.
3592	3609	shale
3609	3625	lime and shale
3625	3639	variegated shale
		Conglomerate @ 3639
3639	3645	conglomerate
3645	3669	conglomerate - sand and dolomite - re-worked Arbuckle.
		Arbuckle @ 3669
3669	3676	dolomite
	3676	Total Depth

Commenced: 12- 6-43
Completed: 12-22-43
I. P. Dry Hole

CASING RECORD
10-3/4" @ 159' w/ 80
sacks cement

PLUGGING	
FILE	20 24 2 194
BOOK	PAGE 103 LINE 21

12-31-43